

Natural Conditions
Assessment for low DO
Butterwood Creek, White Oak Creek, Rocky
Run Creek, and Reedy Creek in
Dinwiddie and Nottoway Counties,
Virginia

Submitted by

Virginia Department of Environmental Quality

December 2005

TABLE OF CONTENTS

- Executive Summary1
- 1. Introduction.....3
- 2. Physical Setting3
 - 2.1. Listed Water Bodies3
 - 2.2. Watershed5
 - 2.2.1. General Description5
 - 2.2.2. Geology, Climate, Land Use5
- 3. Description of Water Quality Problem/Impairment8
 - 3.1. Associated Mainstem and Tributary Site DO.....9
- 4. Water Quality Standard15
 - 4.1. Designated Uses15
 - 4.2. Applicable Water Quality Criteria16
- 5. Assessment of Natural Conditions affecting low DO16
 - 5.1. Preliminary Data Screen for Low Flow 7Q10.....20
 - 5.2. Low Slope, Swamps, or Wetlands21
 - 5.3. Instream Nutrients29
 - 5.4. Natural Seasonal DO Fluctuation.....29
 - 5.5. Impact from Point Source Dischargers30
- 6. Conclusion30
- 7. Public Participation.....32
- 8. References32
- Appendix A..... A1

LIST OF TABLES

Table 1.	Impaired segment descriptions (Butterwood Creek).....	4
Table 2.	Climate summary for Camp Pickett, Virginia (441322)	7
Table 3.	Land use in the Butterwood Creek Watershed.....	8
Table 4.	DO data collected by DEQ on Butterwood Creek at Rt. 646, 5ABTR002.80	9
Table 5.	Applicable water quality standards.....	16
Table 6.	Instream Nutrients of Butterwood Creek at Rt. 646, 5ABTR002.80	29

LIST OF FIGURES

Figure E1.	Time series of DO Concentrations (station 5ABTR002.80) Sept. 1994 - Mar. 2005	1
Figure 1.	Map of the Butterwood Creek study area	4
Figure 2.	Soil Characteristics of the Butterwood Creek Watershed	6
Figure 3.	Land Use in the Butterwood Creek Watershed.....	8
Figure 4.	Time series of DO Concentrations at Butterwood Creek at Rt. 646, 5ABTR002.80	9
Figure 5.	DO Concentrations at Butterwood Creek at Rt. 641, 5ABTR006.07	10
Figure 6.	DO Concentrations at Butterwood Creek at Rt. 642, 5ABTR008.65	10
Figure 7.	DO Concentrations at Butterwood Creek at Rt. 613, 5ABTR011.12	10
Figure 8.	DO Concentrations at Butterwood Creek at Rt. 643, 5ABTR014.24	11
Figure 9.	DO Concentrations at Butterwood Creek at Green Meadows Lane, 5ABTR016.28	11
Figure 10.	DO Concentrations at Cooks Branch at Rt. 613, 5ACKS000.58.....	11
Figure 11.	DO Concentrations at Reedy Creek at Rt. 644, 5ARDK001.27	12
Figure 12.	DO Concentrations at Rocky Run Creek at Rt. 738, 5ARRC000.92.....	12
Figure 13.	DO Concentrations at Rocky Run Creek at Rt. 622, 5ARRC006.57	12
Figure 14.	DO Concentrations at Stony Creek at Rt. 645, 5ASTO028.19.....	13
Figure 15.	DO Concentrations at Bar Swamp Creek at Rt. 624, 5ABSC002.69.....	13
Figure 16.	DO Concentrations at White Oak Creek at Rt. 624, 5AWOK000.54.....	13
Figure 17.	DO Concentrations at White Oak Creek at Rt. 613, 5AWOK003.23.....	14
Figure 18.	DO Concentrations at White Oak Creek at Rt. 622, 5AWOK006.54.....	14
Figure 19.	DO Concentrations at White Oak Creek at Rt. 620, 5AWOK012.08.....	14
Figure 20.	DO Concentrations at White Oak Creek at Rt. 639, 5AWOK015.35.....	15
Figure 21.	DO Concentrations at UT to Rocky Run Creek at Rt. 647, 5AXFE000.58.....	15
Figure 22.	Aerial Photo of Butterwood Creek Between Stations 5ABTR016.28 and 5ABTR014.24.....	22
Figure 23.	Butterwood Creek at Rt. 643, 5ABTR014.24, Upstream.....	23
Figure 24.	Butterwood Creek at Rt. 643, 5ABTR014.24, Downstream.....	24
Figure 25.	White Oak Creek at Rt. 639, 5AWOK015.35, Upstream.....	25
Figure 26.	White Oak Creek at Rt. 639, 5AWOK015.35, Downstream.....	26
Figure 27.	Butterwood Creek at Rt. 610, 5ABTR006.07, Upstream.....	27
Figure 28.	Butterwood Creek at Rt. 610, 5ABTR006.07, Downstream.....	28
Figure 29.	Butterwood Creek at Rt. 646, 5ABTR002.80.....	29
Figure 30.	Seasonal Variation in DO at Butterwood Creek at Rt. 646, 1994-2005.....	30

Executive Summary


This report presents the assessment of whether low dissolved oxygen (DO) in the Butterwood Creek, and its tributaries White Oak Creek, Rocky Run Creek and Reedy Creek is due to natural conditions or whether a Total Maximum Daily Load (TMDL) must be performed because of anthropogenic impacts. Butterwood Creek watershed is located in Dinwiddie and Nottoway Counties in the Chowan River Basin (USGS Hydrologic Unit Code 03010201). The waterbody identification code (WBID, Virginia Hydrologic Unit) for Butterwood Creek is VAP-K20R-01. There are 133.0 total stream miles in the Butterwood Creek watershed (National Hydrography Dataset (NHD)). The impairment is for low DO.

The drainage area of Butterwood Creek and its tributaries is approximately 94.3 square miles. The average annual rainfall is 46.87 inches. The watershed is approximately 60,439.1 acres in size, and is predominately forested (78.0 percent). Agriculture encompasses 17.2 percent of the watershed, with 4.5 percent cropland and 12.7 percent pasture/hayland. Residential and high use industrial areas compose approximately 0.6 percent of the land base. The remaining 4.2 percent of the watershed is comprised of 3.5 percent of transitional areas and grasses, and 0.7 percent wetlands and open water.

The impaired segment is 46.43 stream miles from the headwaters near Fort Pickett, VA to its confluence with Stony Creek. An assessment of low pH due to natural conditions has been performed on the Butterwood Creek watershed in a separate document.

Butterwood, White Oak, Rocky Run and Reedy Creeks were listed as impaired on Virginia's 2002 303(d) Total Maximum Daily Load Priority List and Report and the 2004 305(b) / 303(d) Integrated Report (VADEQ, 2002 & 2004) due to violations of the State's water quality standard for dissolved oxygen and pH. A total of 90 DO data points, with 8 water quality standard violations (8.9%), have been taken by DEQ at station 5ABTR002.80 (see Figure E1) from September 14, 1994 through March 9, 2005.

Figure E1. Time series of DO concentrations (station 5ABTR002.80), Sept. 1994 through Mar. 2005.

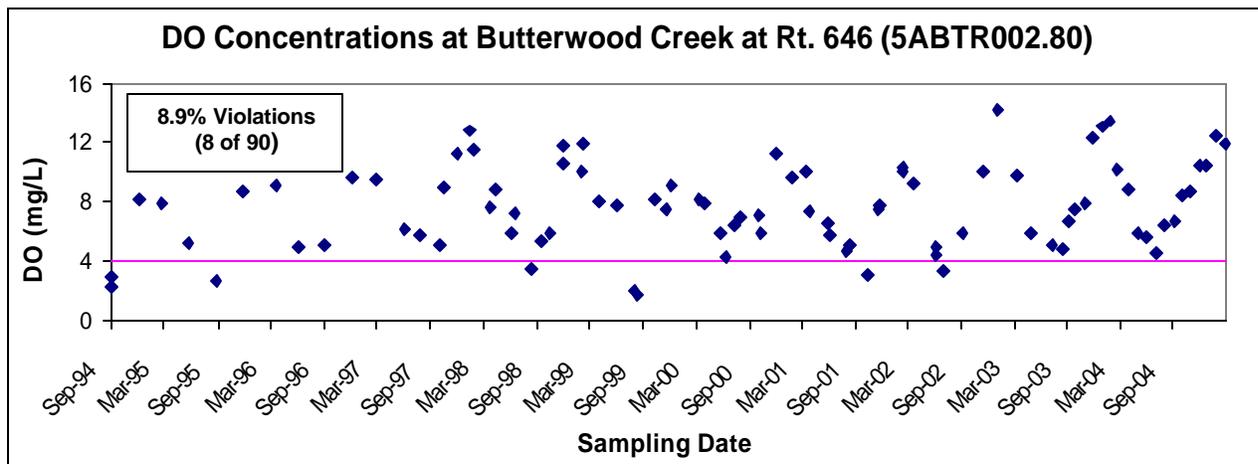

According to Virginia Water Quality Standards (9 VAC 25-260-10A), "all state waters are designated for the following uses: recreational uses (e.g., swimming and boating); the propagation and growth of a balanced indigenous population of aquatic life, including game fish, which might be reasonably expected to inhabit them; wildlife; and the production of edible and marketable natural resources (e.g., fish and shellfish)."

As indicated above, Butterwood Creek must support all designated uses and meet all applicable criteria. The Butterwood Creek now appears to support aquatic life use because DO water quality standard violations are now less than 10.5 percent of total samples. However, three ancillary stations monitored for this assessment still had greater than 10.5 percent low DO violations.

VADEQ proposes a methodology for determining whether low DO originates from natural or anthropogenic sources, adapted from "Methodology for Assessing Natural Dissolved Oxygen and pH Impairments: Application to the Appomattox River Watershed, Virginia." (MapTech 2003)

The level of dissolved oxygen in a water body is determined by a balance between oxygen-depleting processes (e.g., decomposition and respiration) and oxygen restoring processes (e.g., aeration and photosynthesis). Certain natural conditions promote a situation where oxygen-restoring processes are not sufficient to overcome the oxygen-depleting processes. Conditions in a free-flowing stream that would typically be associated with naturally low DO include slow-moving, ripple-less waters where the bacterial decay of organic matter depletes DO at a faster rate than it can be replenished. Indicators of these conditions include low slope, the presence of wetlands, and often low pH due to organic acids (tannins, humic and fulvic substances) produced in the decay process.

These situations can be compounded by anthropogenic activities that contribute excessive nutrients or readily available organic matter to these systems. The general approach to determine if DO and pH impairments in free-flowing streams are due to natural conditions is to assess a series of water quality and hydrologic criteria to determine the likelihood of an anthropogenic source. A logical 4-step process for identifying natural conditions that result in low DO and/or pH levels and for determining the likelihood of anthropogenic impacts that will exacerbate the natural condition is described below. DEQ staff is proposing to use this approach to implement State Water Control Law 9 VAC 25-260-55, Implementation Procedure for Dissolved Oxygen Criteria in Waters Naturally Low in Dissolved Oxygen.

Before implementing this procedure for low DO, all DO data should be screened for flows less than the 7Q10. DO data collected on days when flow was < 7Q10 should be eliminated from the data set and the violation rate recalculated accordingly.

- Step 1. Determine slope and appearance (presence of wetlands).
- Step 2. Determine nutrient levels and compare with USGS background concentrations.
- Step 3. Determine degree of seasonal fluctuation (for DO only).
- Step 4. Determine anthropogenic impacts from permitted dischargers and land use.

The 7Q10 for Butterwood Creek at the original listing station is 0.14 cfs. No low DO violations occurred below 7Q10, therefore no DO violations were eliminated.

The hydrologic slope of Butterwood Creek is estimated at 0.14%, which is considered low slope. The low slope in this 15.59 mile segment (about 96 percent of its length) contributes no human impact. Decomposition of the large inputs of decaying vegetation from areas of forested land with swamps and heavy tree canopy throughout the watershed increase oxygen demand and lower DO as they decay. These are not considered anthropogenic impacts.

Butterwood Creek now appears to support aquatic life use because DO water quality standard violations are now less than 10.5 percent of total samples (see Figure E1). However, three of the total 18 stations monitored in 2003 – 2004 for this low DO assessment had more than 10.5 percent low DO violations. These were 5ABTR014.24, the second most upstream station on Butterwood Creek; 5AWOK015.35, the most upstream White Oak Creek station; and 5ABTR006.07, a lower Butterwood Creek station below a swamp of extended length. The causes for low DO at these three stations are explained below.

Station 5ABTR014.24 has a slope of 0.24 percent, which is considered low slope. However this segment contains a large pond approximately 0.5 miles in length, and a second backwatered area just upstream of 5ABTR014.24 extending downstream past the station. DEQ believes the low DO at this station is due partly to instream natural decay of vegetative material and low flow impact due to the reservoir impoundment upstream.

Station, 5AWOK015.35 has a slope of 0.61 percent, which is considered too high for swampwater conditions. However flows estimated during two summer low DO violations were 0.27 and 0.35 cfs in May and June 2004. DEQ believes these low flows impact DO levels by not allowing sufficient velocity

and increasing residence time. Such low flow impacts are a natural condition due to the small drainage area, but are not related to swamp conditions.

Butterwood Creek at station 5ABTR006.07 has a slope of only 0.10 percent, which is considered very low slope. This is a 38 percent reduction in slope compared to the next six miles upstream at 0.16 percent slope. This upper segment contains a long swampy reach 4.6 miles in length. This upstream swampy reach supplies a large source of vegetative material for bacterial decomposition. DEQ believes that a significant portion of the vegetative decay occurs downstream of this segment in the slower 0.10 percent slope segment sampled by station 5ABTR006.07. This lower segment is heavily forested and also has the appearance of swampy conditions. DEQ believes the low DO at this station is due to natural decay of vegetative matter from upstream and reduction in slope and presumed slower velocity in the downstream segment. The swampwater effect occurs approximately between rivermiles 14.59 and 4.65, for a total of 9.94 stream miles.

Butterwood Creek exhibits low nutrient concentrations below national background levels in streams from undeveloped areas, which not indicative of human impact.

Butterwood Creek exhibits natural seasonal DO fluctuation due to the inverse relationship between water temperature and DO.

There is a single permitted CAFO operation located in the Butterwood Creek watershed below the listing station 5ABTR002.80. The permit conditions for this facility do not allow discharge into the creek. This facility probably has minimal impact to the low DO conditions of the creek. Residential / Commercial land use (0.60%) probably has no DO effect on streams in the watershed.

Based on the above information, a change in the water quality standards classification to Class VII Swampwater due to natural conditions, rather than a TMDL, is indicated for mainstem Butterwood Creek from rivermile 14.59 downstream to rivermile 4.65, a total of 9.9 stream miles. If there is a 305(b)/303(d) assessment prior to the reclassification, Butterwood Creek will be assessed as Category 4C, Impaired due to natural condition, no TMDL needed.

DEQ performed the assessment of the Butterwood and its tributaries low DO natural conditions in lieu of a TMDL. Therefore neither a TMDL Technical Advisory Committee (TAC) meeting nor a public meeting was involved. Public participation will occur during the next water quality standards triennial review process.

1. Introduction

Butterwood Creek and its tributaries were listed as impaired on Virginia's 2002 303(d) Total Maximum Daily Load Priority List and Report and the 2004 305(b) / 303(d) Integrated Report (VADEQ, 2002 & 2004) due to violations of the State's water quality standard for dissolved oxygen and pH. This report evaluates the DO impairment by determining if natural conditions are the cause of the impairment, thus obviating the need for a TMDL. The pH impairment has been addressed separately from this document.

A glossary of terms used throughout this report is presented as Appendix A.

2. Physical Setting

2.1 Listed Water Bodies

Butterwood Creek and its tributaries are located in Dinwiddie and Nottoway Counties in the Chowan River and Dismal Swamp Basins (USGS Hydrologic Unit Code 03010201). The waterbody identification code (WBID, Virginia Hydrologic Unit) for non-tidal Butterwood Creek is VAP-K20R-01. There are 133.0 total stream miles in the Butterwood Creek watershed (National Hydrography Dataset (NHD)). The impaired segment is 46.43 stream miles of Butterwood Creek and its tributaries. This report addresses only the DO

2.2. Watershed

2.2.1. General Description

Butterwood Creek, White Oak Creek, Rocky Run Creek and Reedy Creek, located within Dinwiddie and Nottoway Counties, Virginia, are minor tributaries to the Chowan River and the Dismal Swamp. They are approximately 133.0 miles long and flow east from their headwaters near Fort Pickett, VA to their confluence with Stony Creek. The watershed itself has an area of approximately 94.3 miles. There is no continuous flow gaging station on Butterwood Creek or its tributaries, however there is a gage on Stony Creek near Dinwiddie, VA, 02046000, located 5.6 miles southeast of Butterwood Creek, with a drainage area of 112 mi².

2.2.2. Geology, Climate, Land Use

Geology and Soils


Butterwood Creek is in the Piedmont physiographic region. The Piedmont of Virginia extends eastward from the Blue Ridge to the Fall Line, where Paleozoic-age and older igneous and metamorphic rocks are covered by unconsolidated sediments of the Atlantic Coastal Plain. The Virginia Piedmont is part of the greater southeastern Piedmont, which extends from northeastern Alabama through Georgia, South Carolina, North Carolina, Virginia, Maryland, and southeastern Pennsylvania. The Piedmont is characterized by deeply weathered, poorly exposed bedrock and a high degree of geological complexity, making it one of the last frontiers of North American regional geology. The Piedmont contains a collage of rock associations or terranes that are bounded by northeast-trending regional faults. (<http://www.geology.state.va.us/DOCS/Geol/pied.html>).

Soils for the Butterwood Creek watershed were documented utilizing the VA State Soil Geographic Database (STATSGO). Two general soil types were identified using in this database. Descriptions of these soil series were derived from queries to the USDA Natural Resources Conservation Service (NRCS) Official Soil Series Description web site (<http://ortho.ftw.nrcs.usda.gov/cgi-bin/osd/osdname.cgi>). Figure 2 shows the location of these general soil types in the watershed.

Soils of the Appling-Wedowee-Ashlar-Louisburg-Vance-Worsham series (VA030) are moderate to very deep that formed in residuum from weathered igneous, metamorphic, and crystalline rock of the Piedmont Plateau. Soils range from excessively to poorly drained, with moderately rapid to slow permeability.

Soils of the Georgeville-Nason-Iredell-Lignum-Orange-Goldston series (VA045): are deep range from poorly to moderately to well drained. These soils are slow to moderately permeable with slow to medium to high runoff. They were formed from upland materials of weathered fine-grained metamorphic

Figure 2. Soil Characteristics of the Butterwood Creek Watershed.

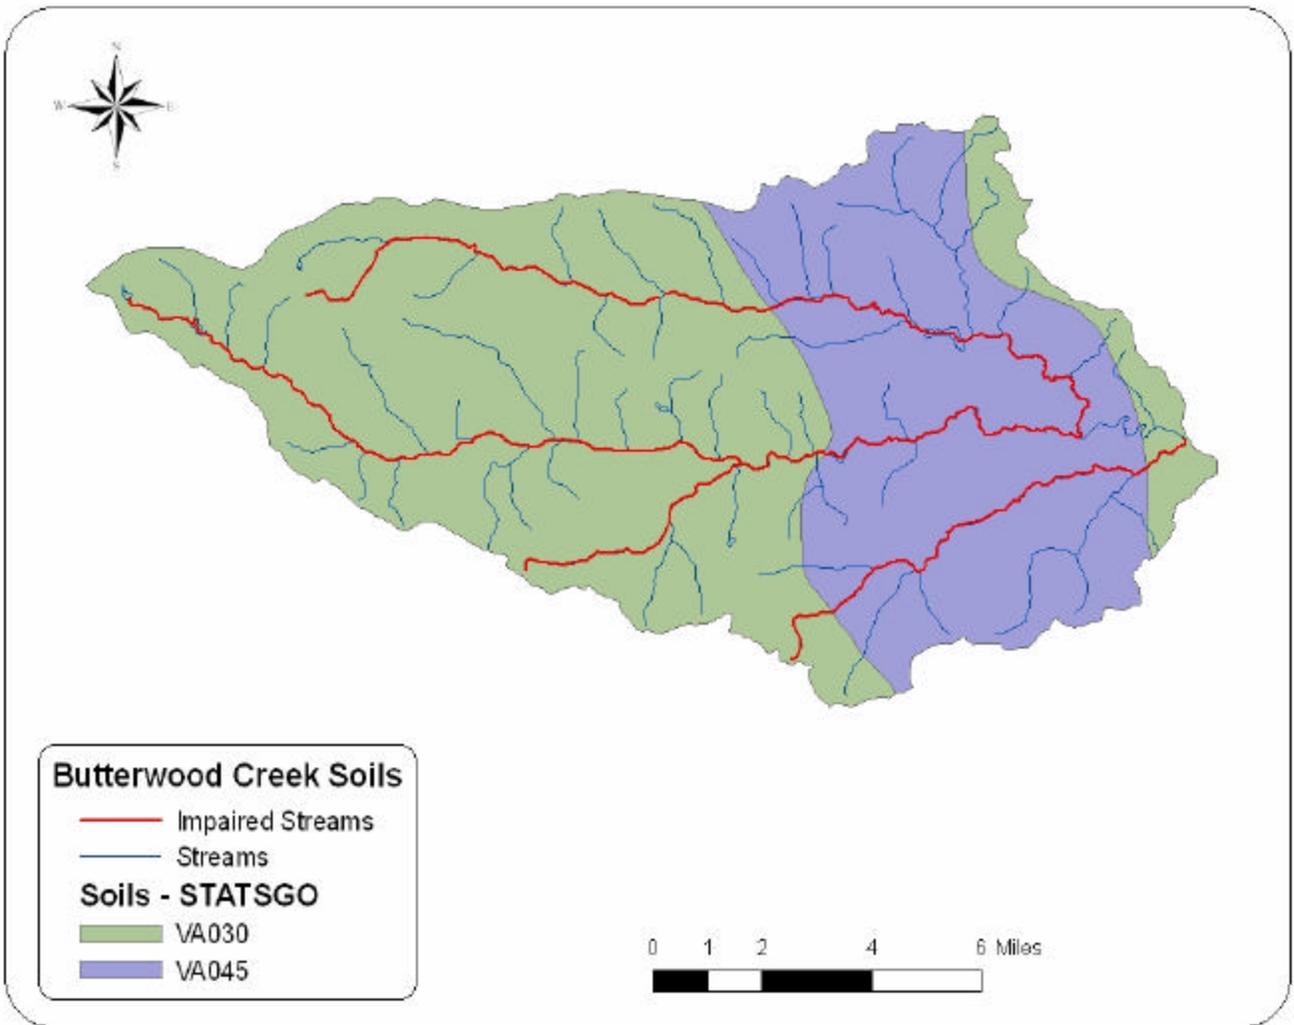

Climate

The climate summary for Butterwood Creek comes from a weather station located in Camp Pickett, VA with a period of record from 1/21/1972 to 3/31/2004. The average annual maximum and minimum temperature (°F) at the weather station is 68.8 and 43.9 and the annual rainfall (inches) is 46.87 (Table 2) (Southeast Regional Climate Center, http://www.sercc.com/climateinfo/historical/historical_va.html).

Table 2. Climate summary for Camp Pickett, Virginia (441322)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual
Average Max. Temperature (F)	47.0	51.1	59.6	69.5	77.1	84.1	88.0	86.6	80.4	70.2	61.3	50.7	68.8
Average Min. Temperature (F)	24.0	26.0	33.4	41.9	51.4	60.3	65.2	63.8	56.4	43.0	34.8	27.2	43.9
Average Total Precipitation (in.)	4.16	3.13	4.43	3.65	4.18	4.02	4.52	4.47	4.29	3.59	3.11	3.31	46.87

Land Use


The Butterwood Creek watershed extends approximately 16.7 miles upstream from its confluence with the Stony Creek to its headwaters near the Fort Pickett, VA, and is about 7.5 miles wide. The watershed is approximately 60,439.1 acres in size and is predominately forested (78.0 percent). Agriculture encompasses 17.2 percent of the watershed, with 4.5 percent cropland and 12.7 pasture/hayland. Residential and high use industrial areas compose approximately 0.6 percent of the land base. The remaining 4.2 percent of the watershed is comprised of 3.5 percent of transitional areas and grasses, and 0.7 percent wetlands and open water. Land use is described in Table 3.

A map of the distribution of land use in the watershed (Figure 3) shows that agriculture and forest land cover the majority of the watershed with little to no urban land present.

Table 3. Land Use in the Butterwood Creek Watershed

Landuse	Acres	Percent of Total
Open Water	169.2	0.28
Low Intensity Residential	67.4	0.11
High Intensity Residential	2.4	0.00
High Intensity Commercial/Industrial/Transportation	295.3	0.49
Bare Rock/Sand/Clay	0.0	0.00
Quarries/Strip Mines/Gravel Pits	0.0	0.00
Transitional	2151.7	3.56
Deciduous Forest	24504.1	40.54
Evergreen Forest	8024.0	13.28
Mixed Forest	14588.9	24.14
Pasture/Hay	7697.1	12.74
Row Crops	2700.1	4.47
Other Grasses (Urban/recreational; e.g. parks)	0.0	0.00
Woody Wetlands	199.5	0.33
Emergent Herbaceous Wetlands	39.4	0.07
TOTAL:	60439.1	100.00
	94.3 sq. miles	

Figure 3. Land Use in the Butterwood Creek Watershed

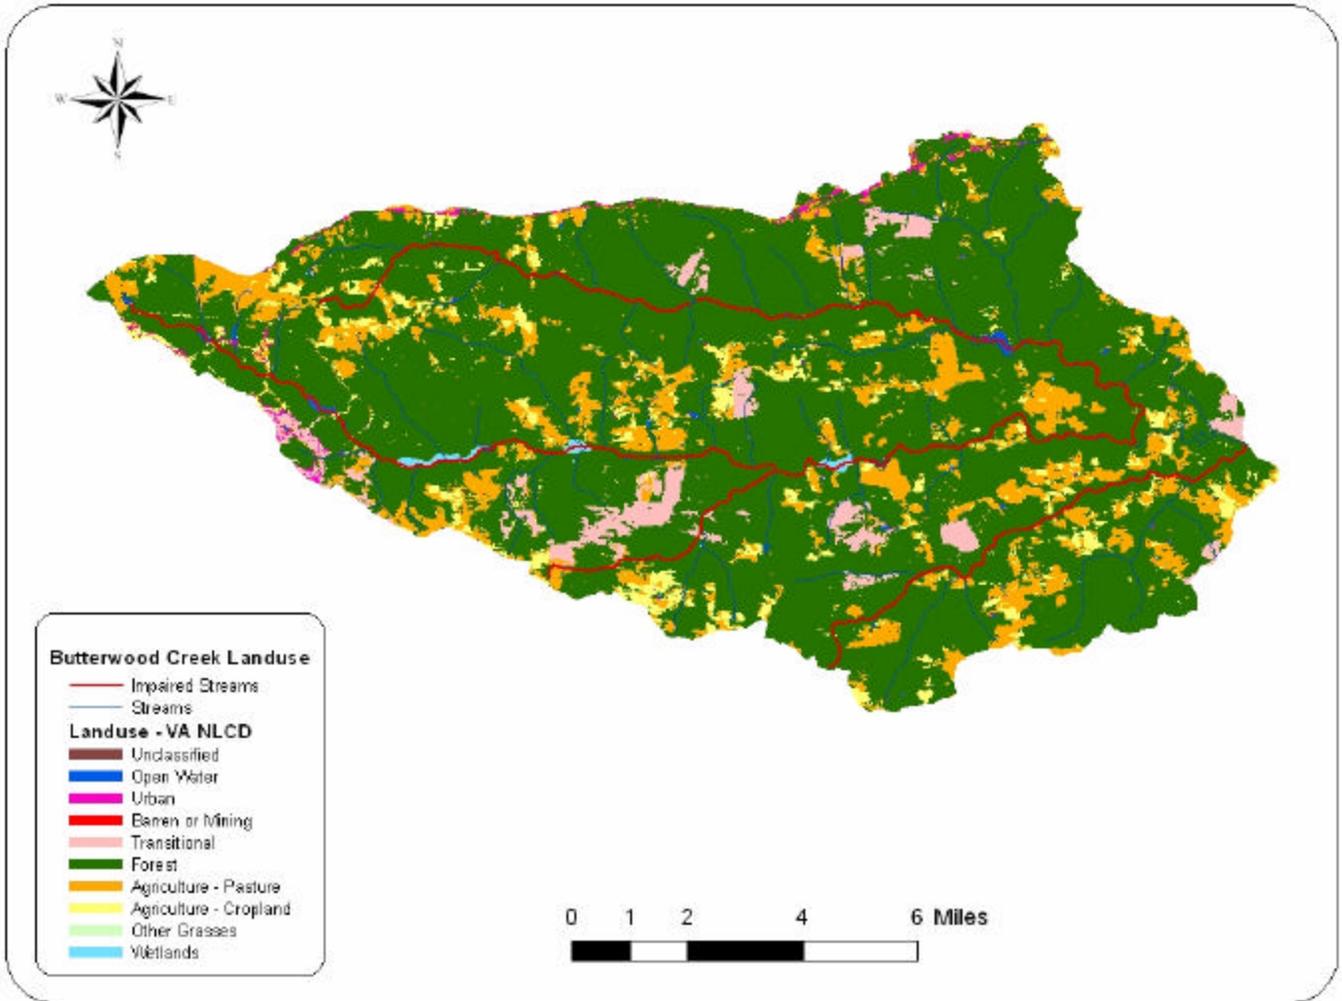

3. Description of Water Quality Problem/Impairment

Butterwood Creek and its tributaries were listed as impaired on Virginia's 2002 303(d) Total Maximum Daily Load Priority List and Report and the 2004 305(b) / 303(d) Integrated Report (VADEQ, 2002 & 2004) due to violations of the State's water quality standard for dissolved oxygen and pH (2002 and 2004).


A total of 90 DO data points, with 8 water quality standard violations (8.9%), have been taken by DEQ at station 5ABTR002.80 (see Figure 1) from September 14, 1994 through March 9, 2005 (Table 4).

Table 4. DO data collected by DEQ on Butterwood Creek at Rt. 646.

Station	Date of First Sample	Date of Last Sample	Number of Samples	mg/l			Number of Violations
				Average	Minimum	Maximum	
5ABTR002.80	9/14/94	3/9/05	90	7.59	1.77	14.32	8

A time series graph of all data collected at station 5ABTR002.80 shows the DO concentrations ranging from 1.71 mg/l to 14.32 mg/l (Figure 4). The horizontal line at the DO = 4.0 mg/l mark represents the minimum water quality standard. The data points below the DO = 4.0 mg/l line illustrate violations of the water quality standard.

Figure 4. Time series of DO Concentrations at Butterwood Creek at Rt. 646, 5ABTR002.80.

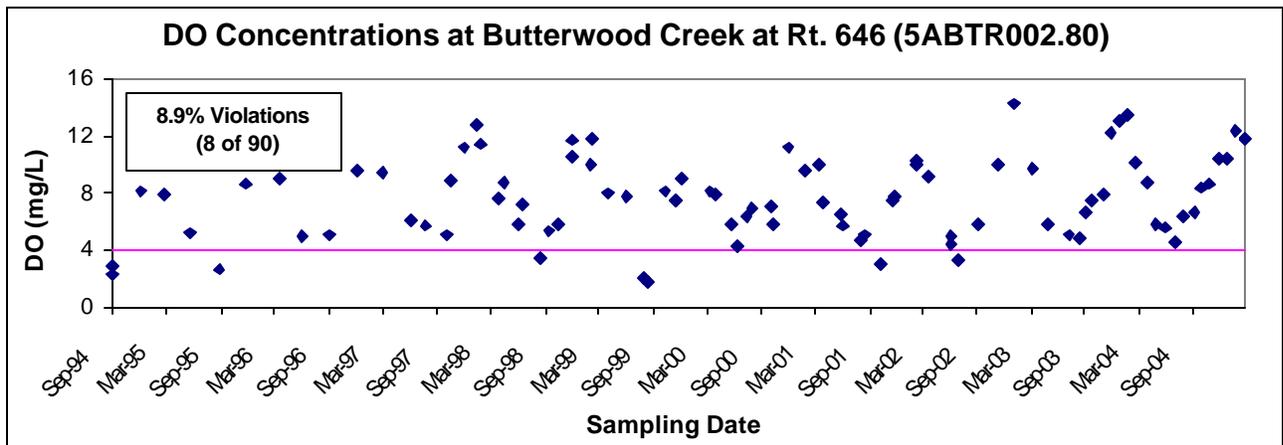

3.1 Associated Mainstem and Tributary site DO

DEQ added 17 associated mainstem and tributary monitoring stations during data collection for the low DO assessment of natural conditions or development of a TMDL. Associated station DO data are presented in Figures 5-21 below.

Figure 5. DO Concentrations at Butterwood Creek at Rt. 610, 5ABTR006.07.

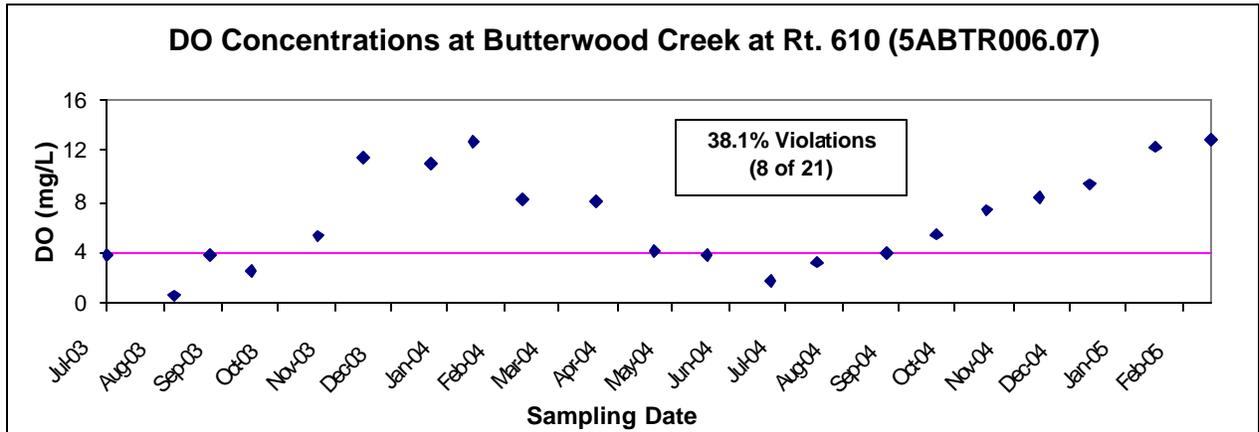


Figure 6. DO Concentrations at Butterwood Creek at Rt. 642, 5ABTR008.65.

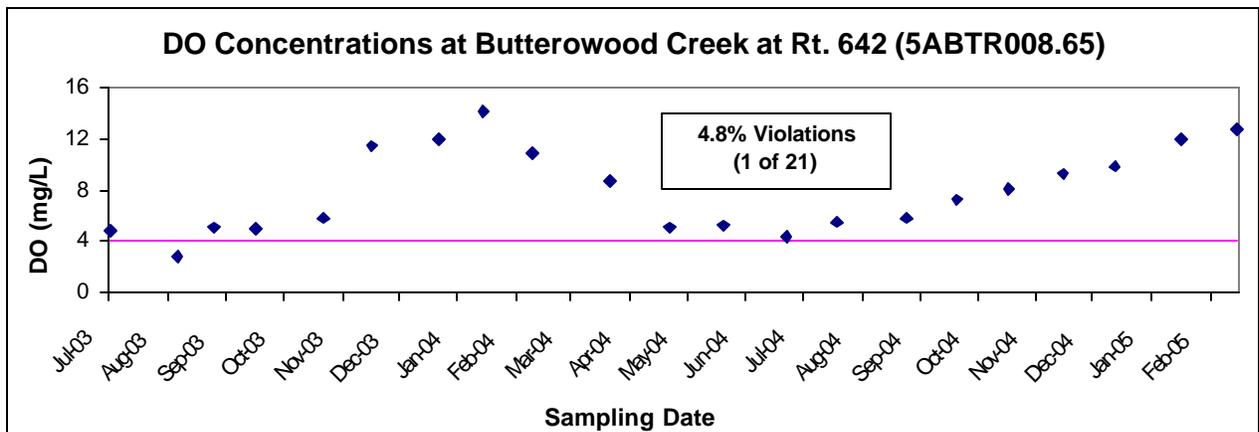


Figure 7. DO Concentrations at Butterwood Creek at Rt. 613, 5ABTR011.12.

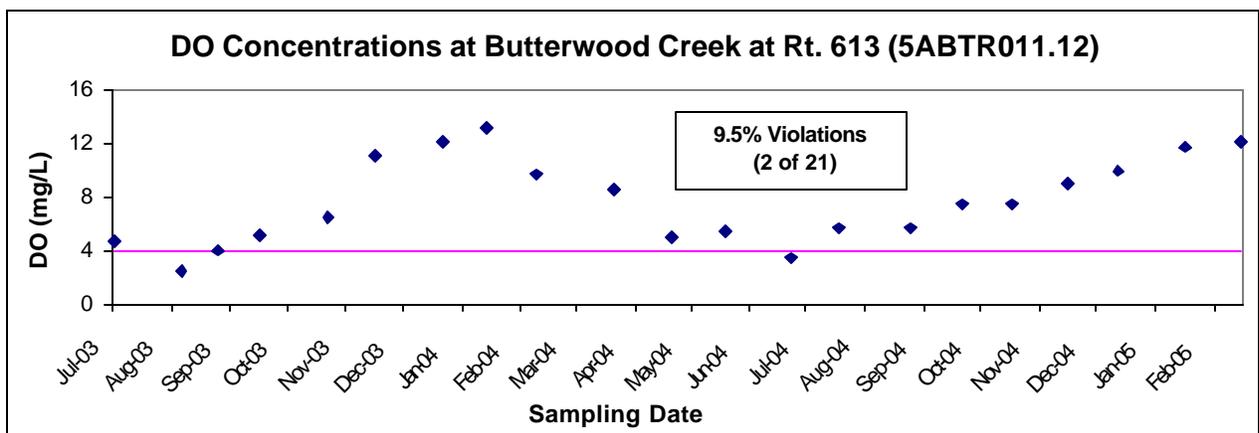


Figure 8. DO Concentrations at Butterwood Creek at Rt. 643, 5ABTR014.24.

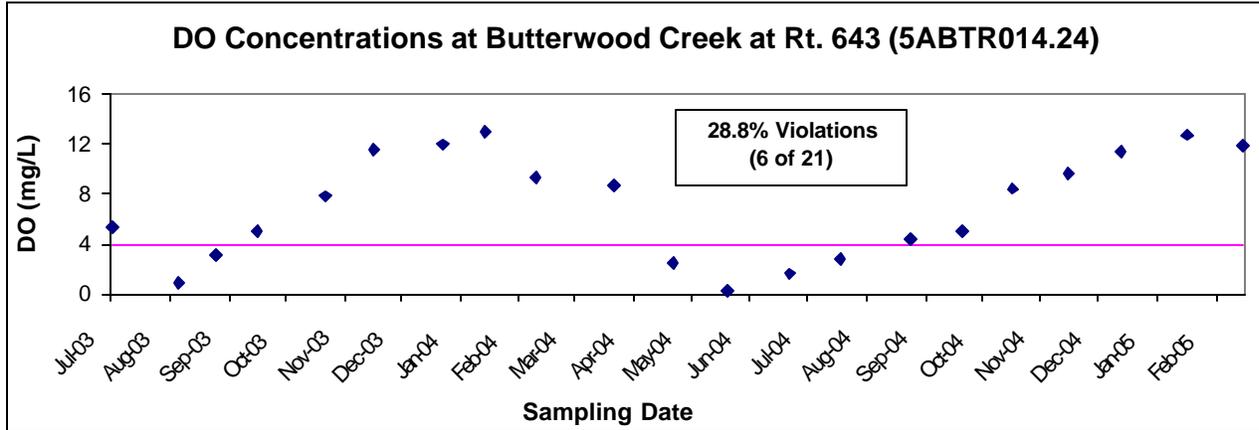


Figure 9. DO Concentrations at Butterwood Creek at Green Meadows Lane, 5ABTR016.28.

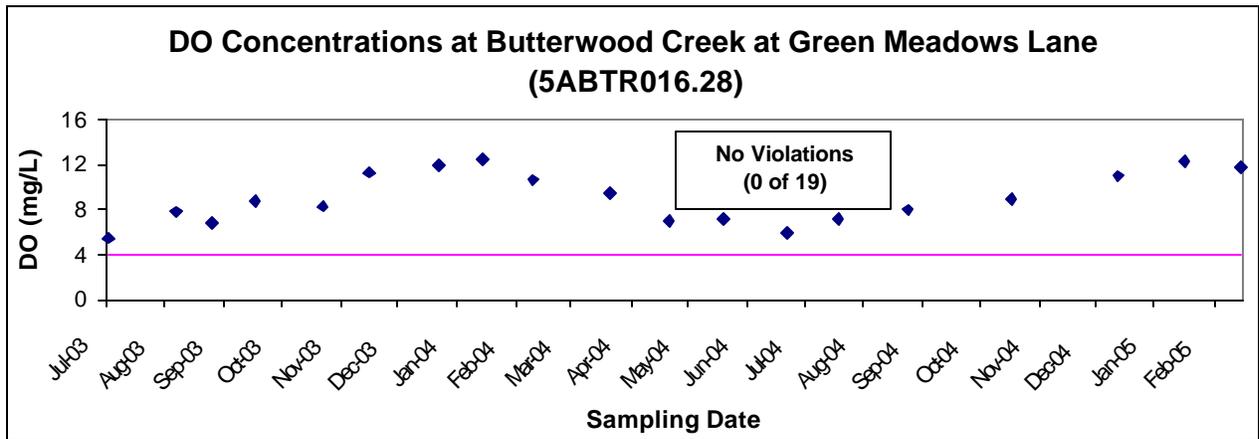


Figure 10. DO Concentrations at Cooks Branch at Rt. 613, 5ACKS000.58.

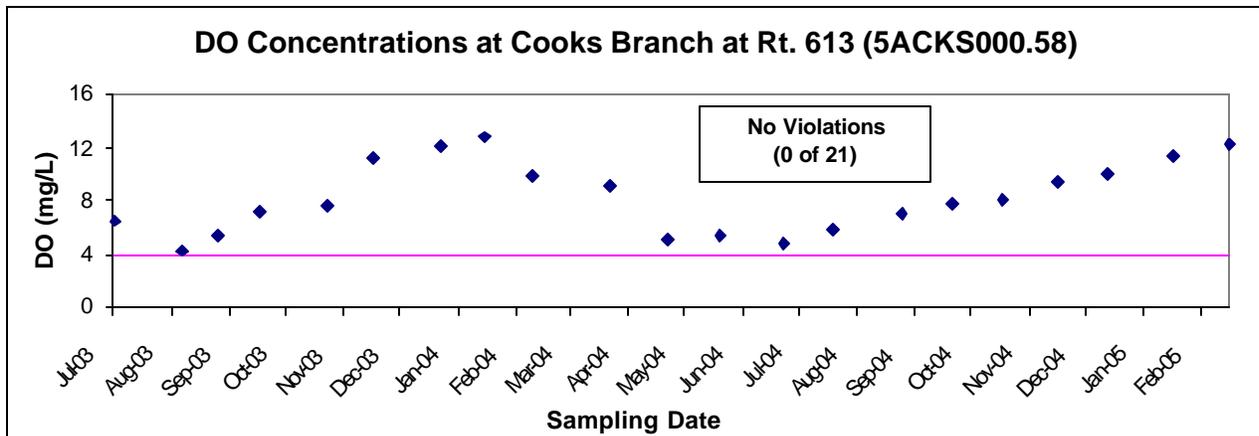


Figure 11. DO Concentrations at Reedy Creek at Rt. 644, 5ARDK001.27.

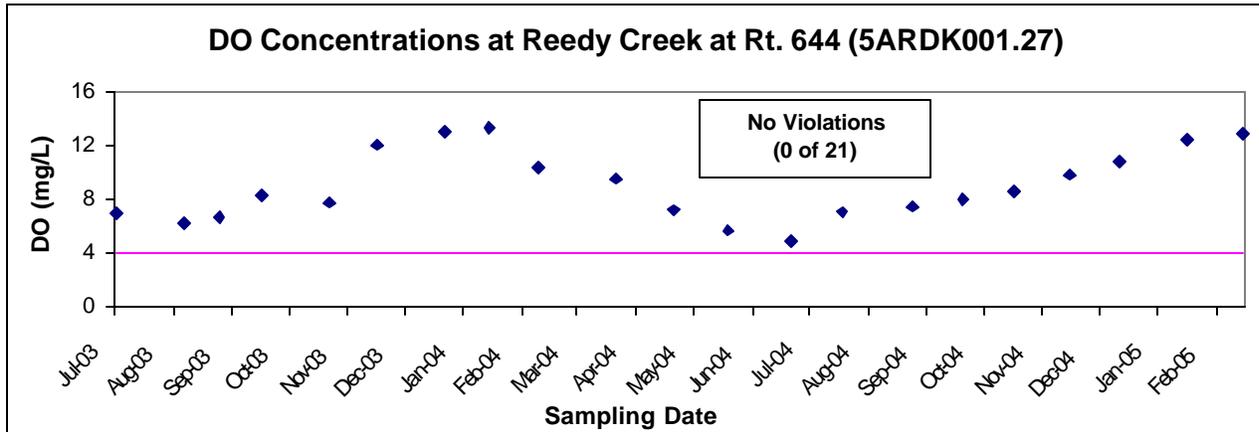


Figure 12. DO Concentrations at Rocky Run Creek at Rt. 738, 5ARRC000.92.

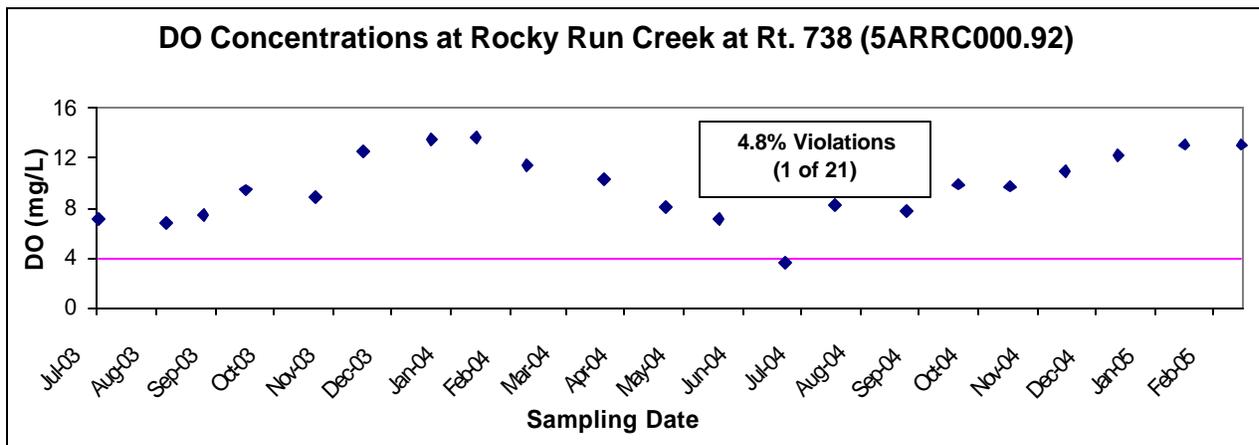


Figure 13. DO Concentrations at Rocky Run Creek at Rt. 622, 5ARRC006.57.

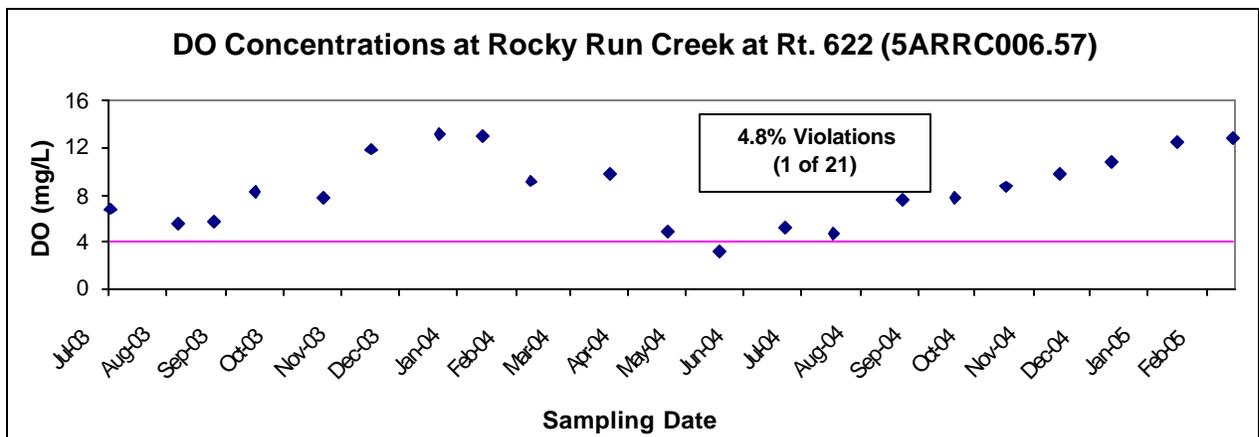


Figure 14. DO Concentrations at Stony Creek at Rt. 645, 5ASTO028.19.

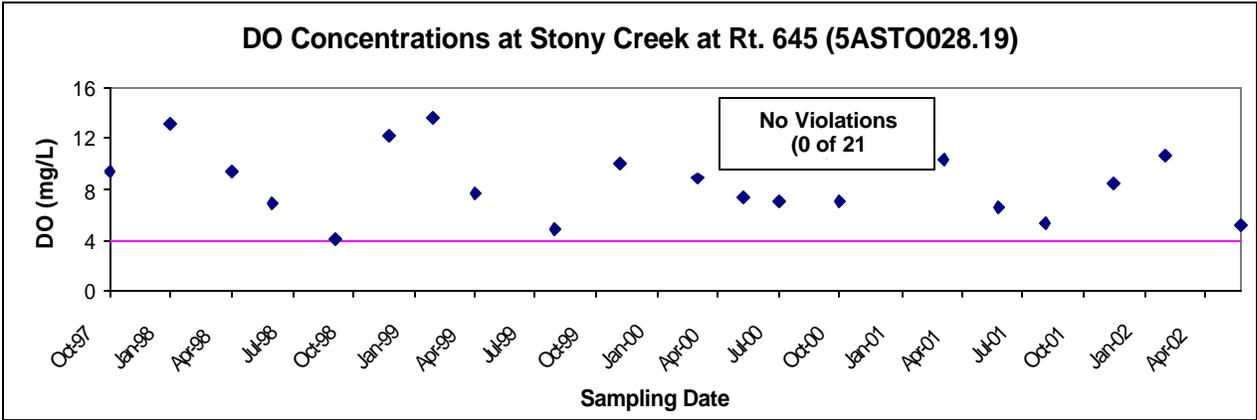


Figure 15. DO Concentrations at Bar Swamp Creek at Rt. 624, 5ABSC002.69.

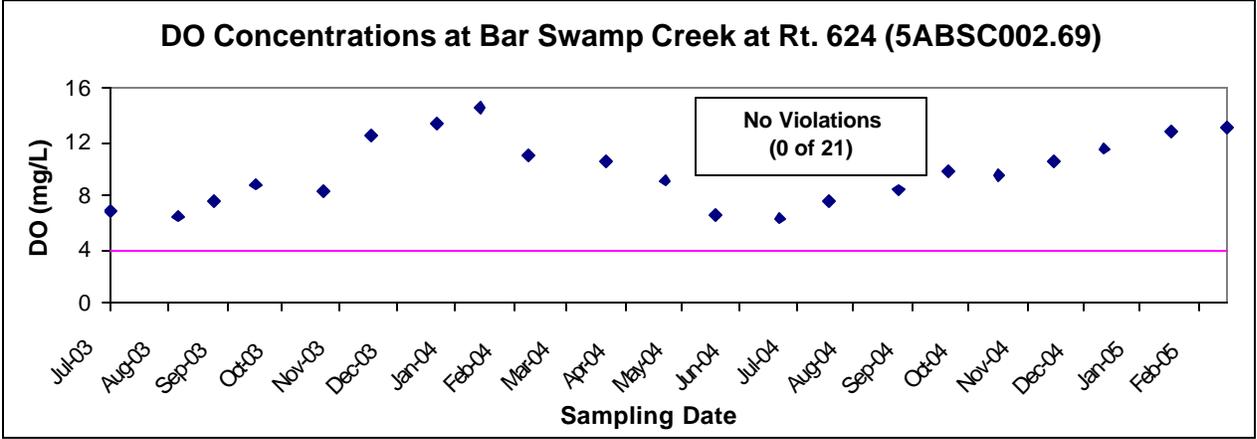


Figure 16. DO Concentrations at White Oak Creek at Rt. 624, 5AWOK000.54.

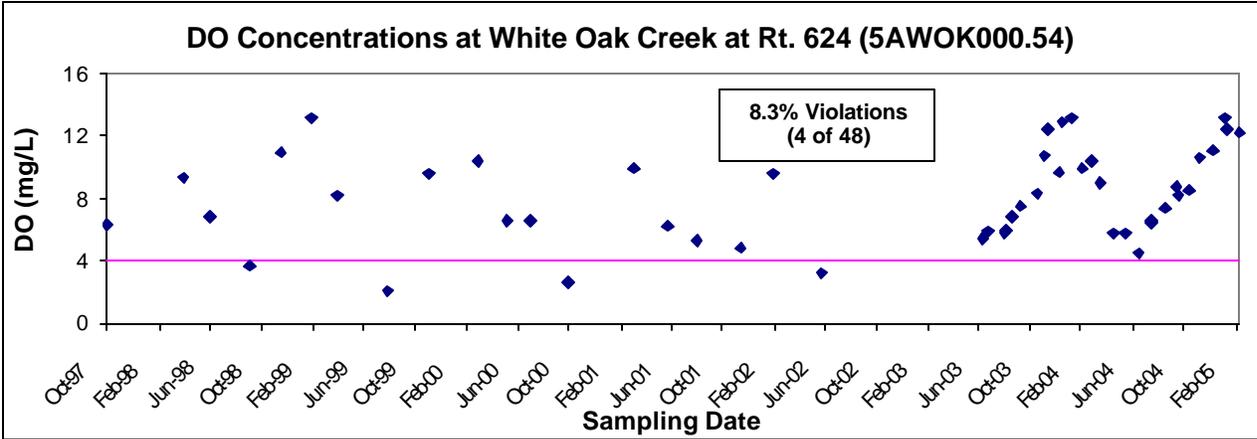


Figure 17. DO Concentrations at White Oak Creek at Rt. 613, 5AWOK003.23.

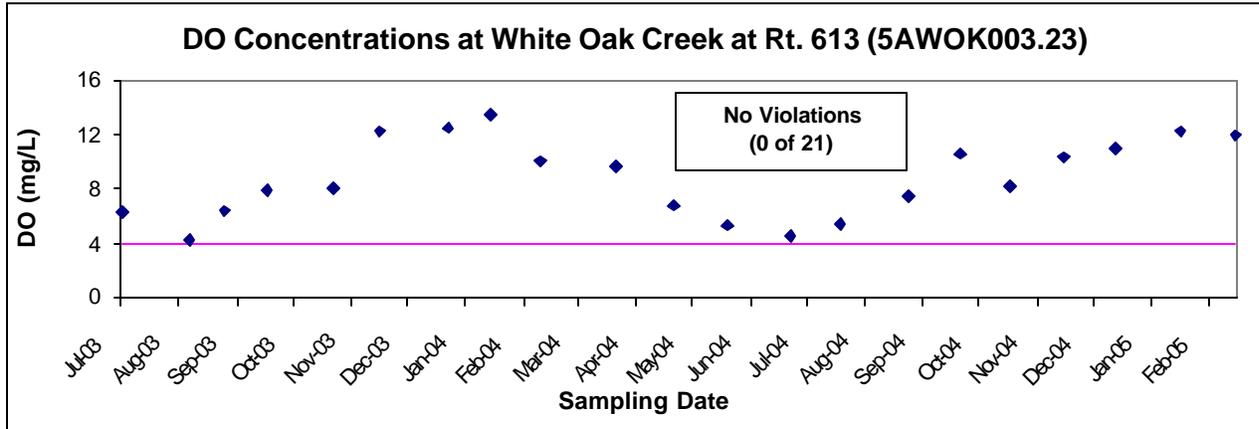


Figure 18. DO Concentrations at White Oak Creek at Rt. 622, 5AWOK006.54.

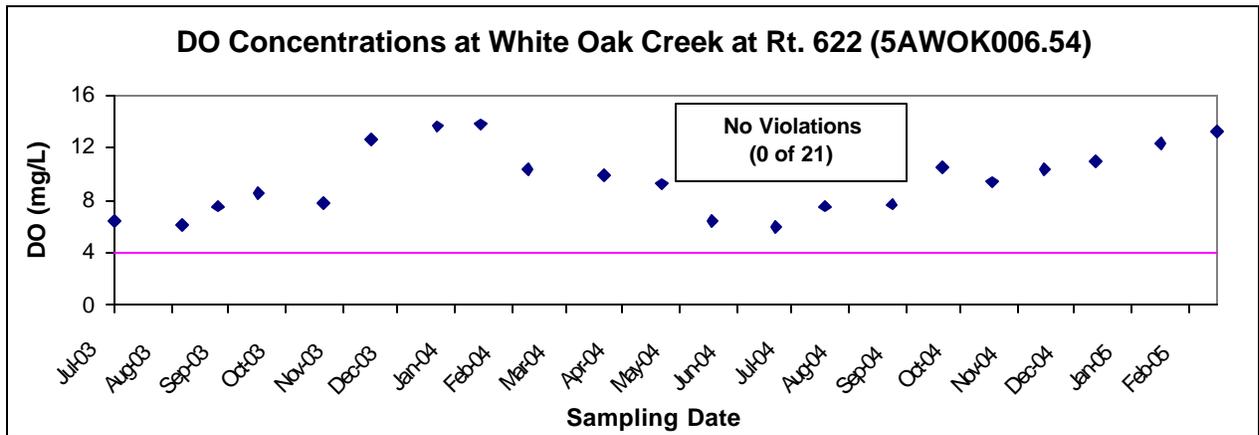


Figure 19. DO Concentrations at White Oak Creek at Rt. 620, 5AWOK012.08.

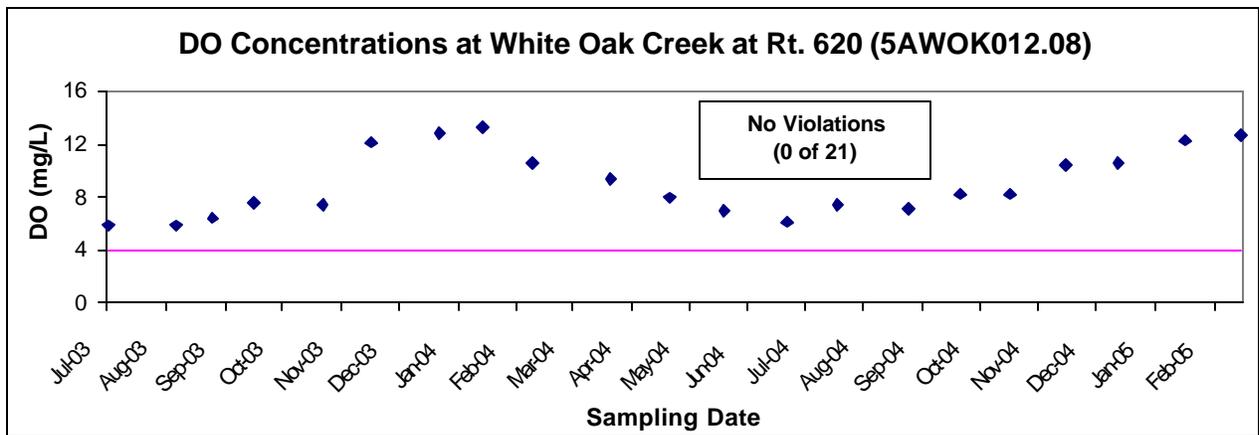


Figure 20. DO Concentrations at White Oak Creek at Rt. 639, 5AWOK015.35.


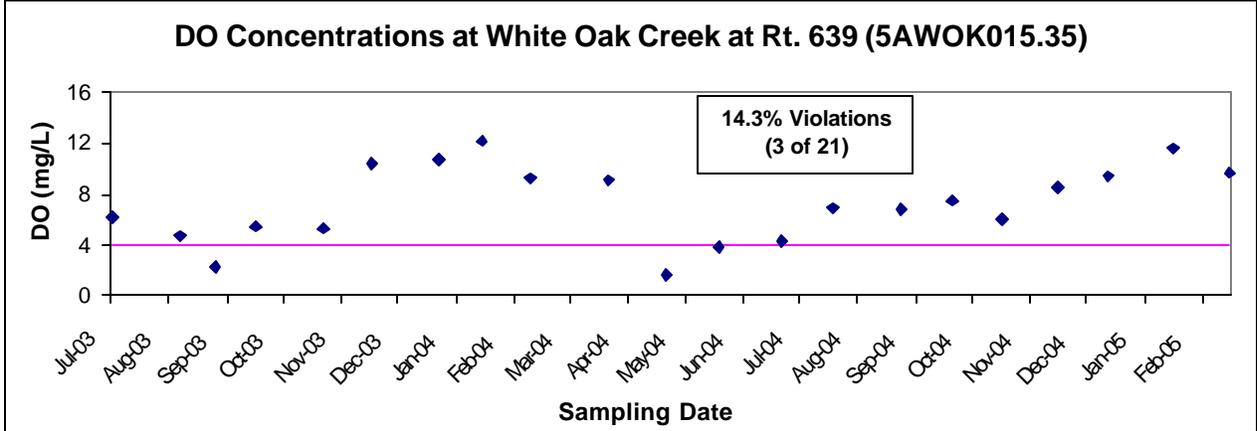


Figure 21. DO Concentrations at UT to Rocky Run Creek at Rt. 647, 5AXFE000.58.

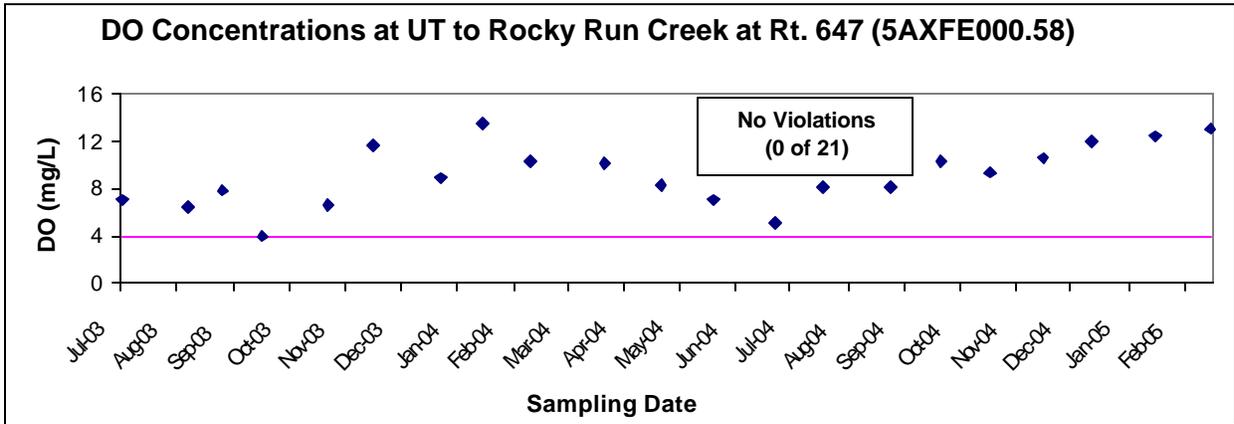

4. Water Quality Standard

According to Virginia Water Quality Standards (9 VAC 25-260-5), the term “water quality standards means provisions of state or federal law which consist of a designated use or uses for the waters of the Commonwealth and water quality criteria for such waters based upon such uses. Water quality standards are to protect the public health or welfare, enhance the quality of water and serve the purposes of the State Water Control Law (§62.1-44.2 et seq. of the Code of Virginia) and the federal Clean Water Act (33 USC §1251 et seq.).”

As stated above, Virginia water quality standards consist of a designated use or uses and a water quality criteria. These two parts of the applicable water quality standard are presented in the sections that follow.

4.1. Designated Uses

According to Virginia Water Quality Standards (9 VAC 25-260-10A), “all state waters are designated for the following uses: recreational uses (e.g., swimming and boating); the propagation and growth of a balanced indigenous population of aquatic life, including game fish, which might be reasonably expected

to inhabit them; wildlife; and the production of edible and marketable natural resources (e.g., fish and shellfish).”

As stated above, Butterwood Creek must support all designated uses and meet all applicable criteria.

4.2. Applicable Water Quality Criteria

The applicable water quality criteria for pH in the Butterwood Creek watershed is an instantaneous minimum DO of 4.0 mg/l.

Table 5. Applicable water quality standards

Parameter	Minimum, mg/l	Maximum, mg/l
DO	4.0	na

If the waterbody exceeds the criterion listed above in more than 10.5 percent of samples, the waterbody is classified as impaired and natural conditions must be determined or a TMDL must be developed and implemented to bring the waterbody into compliance with the water quality criterion.

5. Assessment of Natural Conditions Affecting low DO - Process for determining if DO and pH impairments in free-flowing streams are due to natural conditions.

The level of dissolved oxygen in a water body is determined by a balance between oxygen-depleting processes (e.g., decomposition and respiration) and oxygen-restoring processes (e.g., aeration and photosynthesis). Certain natural conditions promote a situation where oxygen-restoring processes are not sufficient to overcome the oxygen-depleting processes. The level of pH in a water body is determined by a balance between organic acids produced by decay of vegetative material, and buffering capacity. Conditions in a stream that would typically be associated with naturally low DO and pH include slow-moving, ripple-less waters or wetlands where the decay of organic matter produces organic acids. These situations can be compounded by anthropogenic activities that contribute excessive nutrients or readily available organic matter to these systems. The general approach to determine if DO and pH impairments in streams are due to natural conditions is to assess a series of water quality and hydrologic criteria to determine the likelihood of an anthropogenic source. A logical 4-step process for identifying natural conditions that result in low DO and/or pH levels and for determining the likelihood of anthropogenic impacts that will exacerbate the natural condition is described below.

- Step 1. Determine slope and appearance.
- Step 2. Determine nutrient levels.
- Step 3. Determine degree of seasonal fluctuation (for DO only).
- Step 4. Determine anthropogenic impacts.

The results from this methodology (or process or approach) will be used to determine if the stream should be re-classified as Class VII Swamp Waters. Each step is described in detail below.

Procedure for Natural Condition Assessment of low pH and low DO in Virginia Streams

Prepared by Virginia Department of Environmental Quality
October 2004

I. INTRODUCTION

Virginia's list of impaired waters currently shows many waters as not supporting the aquatic life use due to exceedances of pH and/or DO criteria that are designed to protect aquatic life in Class III waters. However, there is reason to believe that most of these streams or stream segments have been mis-classified and should more appropriately be classified as Class VII, Swamp Waters. This document presents a procedure for assessing if natural conditions are the cause of the low pH and/or low DO levels in a given stream or stream segment.

The level of dissolved oxygen (DO) in a water body is determined by a balance between oxygen-depleting processes (e.g., decomposition and respiration) and oxygen-restoring processes (e.g., aeration and photosynthesis). Certain natural conditions promote a situation where oxygen-restoring processes are not sufficient to overcome the oxygen-depleting processes. The level of acidity as registered by pH in a water body is determined by a balance between organic acids produced by decay of vegetative material, and buffering capacity.

Conditions in a stream that would typically be associated with naturally low DO and/or naturally low pH include slow-moving, ripple-less waters. In such waters, the decay of organic matter depletes DO at a faster rate than it can be replenished and produces organic acids (tannins, humic and fulvic substances). These situations can be compounded by anthropogenic activities that contribute excessive nutrients or readily available organic matter to these systems.

The general approach to determine if DO and pH impairments in streams are due to natural conditions is to assess a series of water quality and hydrologic criteria to determine the likelihood of an anthropogenic source. A logical 4-step process for identifying natural conditions that result in low DO and/or pH levels and for determining the likelihood of anthropogenic impacts that will exacerbate the natural condition is described below. DEQ staff is proposing to use this approach to implement State Water

Control Law 9 VAC 25-260-55, Implementation Procedure for Dissolved Oxygen Criteria in Waters Naturally Low in Dissolved Oxygen.

Waters that are shown to have naturally low DO and pH levels will be re-classified as Class VII, Swamp Waters, with the associated pH criterion of 4.3 to 9.0 SU. An associated DO criterion is currently being developed from swamp water data. A TMDL is not needed for these waters. An assessment category of 4C will be assigned until the waterbody has been re-classified.

II. NATURAL CONDITION ASSESSMENT

Following a description of the watershed (including geology, soils, climate, and land use), a description of the DO and/or pH water quality problem (including a data summary, time series and monthly data distributions), and a description of the water quality criteria that were the basis for the impairment determination, the available information should be evaluated in four steps.

Step 1. Determine appearance and flow/slope.

Streams or stream segments that have naturally low DO (< 4 mg/L) and low pH (< 6 SU) are characterized by very low slopes and low velocity flows (flat water with low reaeration rates). Decaying vegetation in such swampy waters provides large inputs of plant material that consumes oxygen as it decays. The decaying vegetation in a swamp water also produces acids and decreases pH. Plant materials contain polyphenols such as tannin and lignin. Polyphenols and partially degraded polyphenols build up in the form of tannic acids, humic acids, and fulvic acids that are highly colored. The trees of swamps have higher polyphenolic content than the soft-stemmed vegetation of marshes. Swamp streams (blackwater) are therefore more highly colored and more acidic than marsh streams.

Appearance and flow velocity (or slope if flow velocity is not available) must be identified for each stream or stream segment to be assessed for natural conditions and potential re-classification as a Class VII swamp water. This can be done through maps, photos, field measurements or other appropriate means.

Step 2. Determine nutrient levels.

Excessive nutrients can cause a decrease in DO in relatively slow moving systems, where aeration is low. High nutrient levels are an indication of anthropogenic inputs of nitrogen, phosphorus, and possibly organic matter. Nutrient input can stimulate plant growth, and the resulting die-off and decay of excessive plankton or macrophytes can decrease DO levels.

USGS (1999) estimated national background nutrient concentrations in streams and groundwater from undeveloped areas. Average nitrate background concentrations are less than 0.6 mg/L for streams, average total nitrogen (TN) background concentrations are less than 1.0 mg/L, and average background concentrations of total phosphorus (TP) are less than 0.1 mg/L.

Nutrient levels must be documented for each stream or stream segment to be assessed for natural conditions and potential re-classification as a Class VII swamp water. Streams with average concentrations of nutrients greater than the national background concentrations should be further evaluated for potential impacts from anthropogenic sources.

Step 3. Determine degree of seasonal fluctuation (for DO only).

Anthropogenic impacts on DO will likely disrupt the typical seasonal fluctuation seen in the DO concentrations of wetland streams. Seasonal analyses should be conducted for each potential Class VII stream or stream segment to verify that DO is depressed in the summer months and recovers during the winter, as would be expected in natural systems. A weak seasonal pattern could indicate that human inputs from point or nonpoint sources are impacting the seasonal cycle.

Step 4. Determine anthropogenic impacts.

Every effort should be made to identify human impacts that could exacerbate the naturally low DO and/or pH. For example, point sources should be identified and DMR data analyzed to determine if there is any impact on the stream DO or pH concentrations. Land use analysis can also be a valuable tool for identifying potential human impacts.

Lastly, a discussion of acid rain impacts should be included for low pH waters. The format of this discussion can be based either on the process used for the recent Class VII classification of several streams in the Blackwater watershed of the Chowan Basin (letter from DEQ to EPA, 14 October 2003). An alternative is a prototype regional stream comparison developed for Fourmile Creek, White Oak Swamp, Matadequin Creek and Mechumps Creek (all east of the fall line). The example analysis under IV in this document, or the example report prepared for Fourmile Creek, illustrate this approach. For streams west of the fall line, a regional stream comparison for 2004 analyses encompasses Winticomack, Winterpock, and Butterwood Creeks.

7Q10 Data Screen

If the data warrant it, a data screen should be performed to ensure that the impairment was identified based on valid data. All DO or pH data that violate water quality standards should be screened for flows less than the 7Q10. Data collected on days when flow was < 7Q10 should be eliminated from the data set and the violation rate recalculated accordingly. Only those waters with violation rates determined days with flows > or = 7Q10 flows should be classified as impaired.

In some cases, data were collected when flow was 0 cfs. If the 7Q10 is identified as 0 cfs as well, all data collected under 0 cfs flow would need to be considered in the water quality assessment. In those cases, the impairment should be classified as 4C,

Impaired due to natural conditions, no TMDL needed. However, a reclassification to Class VII may not always be appropriate.

III. NATURAL CONDITION CONCLUSION MATRIX

The following decision process should be applied for determining whether low pH and/or low DO values are due to natural conditions and justify a reclassification of a stream or stream segment as Class VII, Swamp Water.

If velocity is low or if slope is low (<0.50%) AND
If wetlands are present along stream reach AND
If no point sources or only point sources with minimal impact on DO and pH AND
If nutrients are < typical background
❖ average (= assessment period mean) nitrate less than 0.6 mg/L
❖ average total nitrogen (TN) less than 1.0 mg/L, and
❖ average total phosphorus (TP) are less than 0.1 mg/L AND
For DO: If seasonal fluctuation is normal AND
For pH: If nearby streams without wetlands meet pH criteria OR if no correlation between in-stream pH and rain pH,

THEN determine as impaired due to natural condition
→ assess as category 4C in next assessment
→ initiate WQS reclassification to Class VII Swamp Water
→ get credit under consent decree

The analysis must state the extent of the natural condition based on the criteria outlined above. A map showing land use, point sources, water quality stations and, if necessary, the delineated segment to be classified as swamp water should be included.

In cases where not all of these criteria apply, a case by case argument must be made based on the specific conditions in the watershed.

5.1 Preliminary Data Screen for Low Flow 7Q10

The 7Q10 flow of a stream is the lowest streamflow for seven consecutive days that occurs on average once every ten years. The first step for low flow 7Q10 screening is to determine the most accurate 7Q10 available. There is no long-term flow gaging station in the Butterwood Creek basin.

The 7Q10 flows for the Butterwood Creek DO station may be estimated by a drainage area comparison between 5ABTR002.80 and the drainage area and 7Q10 flow at the Stony Creek gaging station (#01660400) near Dinwiddie, VA, located 5.6 miles southeast of 5ABTR002.80. The 7Q10 for Stony Creek near Dinwiddie was used with a drainage area ratio with the DO site, yielding 7Q10 flows of 0.14 cfs at 5ABTR002.80.

The DO Instantaneous Water Quality Standard applies **AT** 7Q10 flow, but **NOT** below 7Q10 flow (9 VAC 25-260-50 ***). Therefore in streams where the 7Q10 > 0.0 cfs, DO less than 4.0 mg/l taken at flows below 7Q10 are not water quality standard violations. However, in streams where the 7Q10 = 0.0 cfs, **ALL** DO data < 4.0 mg/l are standard violations, even if the flow = 0 cfs when the DO was taken.

At station 5ABTR002.80 on Butterwood Creek, flow was less than the 7Q10 of 0.14 cfs at different periods during October 1993 and July – October 2002. However, no DO measurements were recorded during this time period at the three stations with > 10.5 percent DO violations, so there were no water quality standard violations to eliminate at these stations.

5.2 Low slope, Swamps, Wetlands or Large Forested Areas

There were no discharge measurements made at the Rt. 646 bridge, 5ABTR002.80, the original 303(d) listing station. The hydrologic slope from the 300 ft. topographic contour at rivermile 16.74, located 0.46 mi upstream of Green Meadow Lane (5ABTR016.28), downstream to the 180 ft topographic contour at rivermile 1.15, located 1.65 miles below Rt. 646 (5ABTR002.80) is estimated at 0.14%, which is considered low slope. These locations comprise the approximate upstream and downstream boundaries of this low slope segment on mainstem Butterwood Creek. The low slope in this 15.59 mile segment contributes no human impact. This low slope segment encompasses about 96% of the Butterwood Creek reach from its headwaters to its confluence with Stony Creek. Decomposition of the large inputs of decaying vegetation from areas of forested land with swamps and heavy tree canopy throughout the watershed increase oxygen demand and lower DO as they decay. These are not considered anthropogenic impacts.

However, only three of the total 18 stations monitored in 2003 – 2004 for this low DO assessment had more than 10.5 percent low DO violations. These were 5ABTR014.24, the second most upstream station on Butterwood Creek; 5AWOK015.35, the most upstream White Oak Creek station; and 5ABTR006.07, a lower Butterwood Creek station below a swamp of extended length. The causes for low DO at these three stations are explained below.

Butterwood Creek between station 5ABTR016.28, with no low DO violations, and station 5ABTR014.24 with 28.8 percent violations, has a slope of 0.24 percent (20 ft / 8500.8 ft from topo contours 290 ft and 270 ft at rivermiles 16.20 and 14.59, respectively), which is considered low slope. This segment contains a large pond approximately 0.5 miles long, and a second backwatered area just upstream of 5ABTR014.24 extending downstream past the station, which samples this impounded segment. See Figures 22, 23 and 24 for an aerial view of the two impoundments bracketed by stations 5ABTR016.28 and 5ABTR014.24, and upstream and downstream impounded views of station 5ABTR014.24. Flows estimated during four summer low DO violations at 5ABTR014.24 by drainage area ratio from the Stony Creek near Dinwiddie, VA, gage just below Butterwood Creek, ranged from 1.9 to 2.6 cfs in May – August 2004. However the 0.5 mile impoundment upstream reduces flow by evaporation so that actual flows at 5ABTR014.24 are an unknown amount less than those above. Field staff noted that velocity was seldom seen at this station. DEQ believes the low DO at this station is due partly to instream natural decay of vegetative material and low flow impact due to the reservoir impoundment upstream.

Figure 22. Aerial photo of Butterwood Creek between stations 5ABTR016.28 and 5ABTR014.24.



Figure 23. Butterwood Creek at Rt. 643, 5ABTR014.24, Upstream.



Figure 24. Butterwood Creek at Rt. 643, 5ABTR014.24, Downstream



The most upstream White Oak Creek station, 5AWOK015.35, with 14.3 percent low DO violations, has a slope of 0.61 percent (20 ft / 2640 ft from topo contours 350 ft at rivermile 15.85 and 330 ft at rivermile 15.35). This slope is considered too high for swampwater conditions. However flows estimated during two summer low DO violations at 5AWOK015.35 by drainage area ratio from the Stony Creek near Dinwiddie, VA, gage just below Butterwood Creek, were 0.27 and 0.35 cfs in May and June 2004. DEQ believes these low flows, while not below the 7Q10 of zero cfs, impact DO levels by not allowing sufficient velocity, and increasing residence time. This promotes excessive decay of instream vegetative material from the heavily wooded streambanks. See Figures 25 and 26 for upstream and downstream views of this station after heavy rain in May 2005. In the absence of rain, this creek would be at or near zero flow in summer.

Figure 25. White Oak Creek at Rt. 639, 5AWOK015.35, Upstream



Figure 26. White Oak Creek at Rt. 639, 5AWOK015.35, Downstream



Butterwood Creek at station 5ABTR006.07, with 38.1 percent low DO violations, has a slope of only 0.10 percent (20 ft / 20697.6 ft from topo contours 220 ft and 200 ft at river miles 8.57 and 4.65, respectively), which is considered very low slope. This is a 38 percent reduction in slope compared to the next six miles upstream at 0.16 percent slope (50 ft / 31785.6 ft from topo contours 270 ft and 220 ft at river miles 14.59 and 8.57, respectively). The six mile upstream segment at 0.16 percent slope contains a long swampy segment 4.6 miles in length, from river mile 13.3 downstream to river mile 8.7. This upstream swampy segment supplies a large source of vegetative material for bacterial decomposition. DEQ believes that a significant portion of the vegetative decay occurs downstream of this segment in the slower 0.10 percent slope segment sampled by station 5ABTR006.07, which is heavily forested, and also has the appearance of swampy conditions. See Figures 27 and 28 for upstream and downstream swampy views of station 5ABTR006.07. Thus the impact of the upstream swampy segment occurs in the downstream segment with much lower slope and presumably slower velocity. DEQ believes the low DO at this station is due to instream natural decay of vegetative matter from upstream and reduction in slope and velocity in the downstream segment, surrounding station 5ABTR006.07. The swampwater effect occurs approximately between river miles 14.59 and 4.65.

Figure 27. Butterwood Creek at Rt. 610, 5ABTR006.07, Upstream.



Figure 28. Butterwood Creek at Rt. 610, 5ABTR006.07, Downstream.



Visual inspections of Butterwood Creek from bridges at Rts. 643, 610 and 646, and White Oak Creek at Rt. 639 revealed large pooled or swampy areas with heavy tree canopy. There are large inputs of decaying vegetation from areas of forested land and swamps with heavy tree canopy throughout the watershed that lower DO as they decay. (Figures 23-29).

Figure 29. Butterwood Creek at Rt. 646, 5ABTR002.80.

5.3 Instream Nutrients

The VADEQ collected nutrient data from station 5ABTR002.80 from September 1994 to April 2005 (Table 6). The average nutrient concentrations are at or below the USGS (1999) national background nutrient concentrations in streams from undeveloped areas levels of nitrate < 0.6 mg/l; TN (TKN + NO₃ + NO₂) < 1.0 mg/l; and TP < 0.1 mg/l. These low nutrient levels are not indicative of human impact.

Table 6. Instream Nutrients of Butterwood Creek at Rt. 646 5ABTR002.80.


Parameter	Average Conc.	Number
Total Phosphorus	0.071 mg/l	(n=87)
Orthophosphorus	0.039 mg/l	(n=84)
Total Kjeldahl Nitrogen	0.523 mg/l	(n=88)
Ammonia as N	0.032 mg/l	(n=84)
Nitrate as N	0.041 mg/l	(n=73)
Nitrite as N	0.007 mg/l	(n=73)
TN (TKN + NO₃ + NO₂)	0.554 mg/l	(n=90)

These levels of nitrate, total nitrogen and total phosphorus (bolded in black) are at or below the USGS (1999) national background nutrient concentrations in streams from undeveloped areas levels of nitrate < 0.6 mg/l; TN (TKN + NO₃ + NO₂) < 1.0 mg/l; and TP < 0.1 mg/l.

5.4 Natural Seasonal DO Fluctuation

Butterwood Creek exhibits natural seasonal DO fluctuation due to the inverse relationship between water temperature and DO. DO is high in the winter months while water temperatures are low, and low in the summer months when water temperatures are high. This is depicted in Figure 30.

Figure 30. Seasonal Variation in DO at Butterwood Creek at Rt. 646, 1994– 2005.

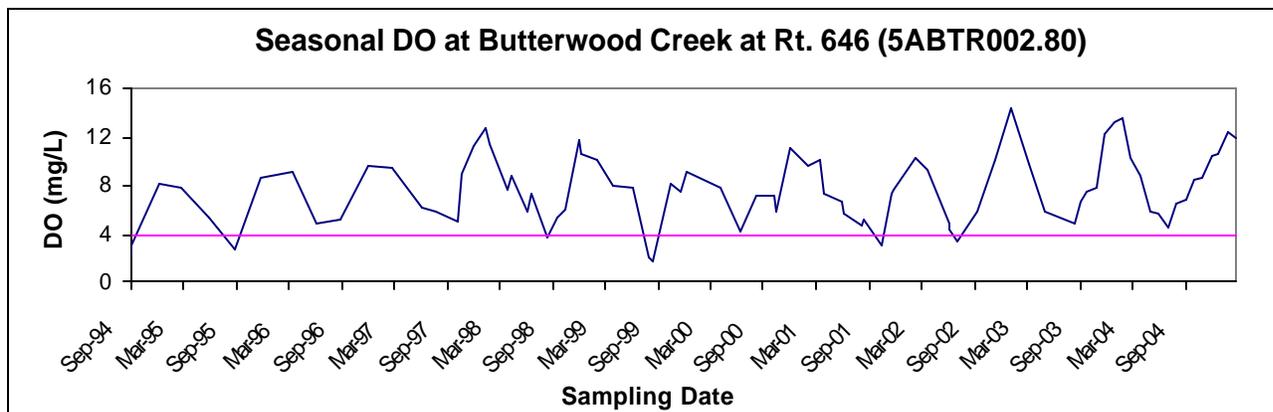

5.5 Impact from Point Source Dischargers and Land Use

There is a single permitted CAFO facility in the Butterwood Creek watershed. Butterwood Farms, permit #VPG100028, is located on the north bank of Butterwood Creek below the listing station 5ABTR002.80. The conditions in this permit do not allow discharge into the stream, and the facility is downstream of the listing station, therefore this facility should have no impact to low DO concentrations in Butterwood Creek.

Residential and high use industrial areas compose approximately 0.6 percent of the land base, an insignificant portion of the watershed. The watershed is predominately forested (78.0 percent), with 0.7 percent wetlands and open water. This land use was considered not indicative of human impact.

6.0 CONCLUSION

The following decision process is proposed for determining whether low DO values are due to natural conditions:

- If slope is low (<0.50) AND
- If wetlands or large areas of forested land are present along stream reach AND
- If no point sources or point sources with minimal impact on DO AND
- If nutrients are < typical background
 - ❖ average (= assessment period mean) nitrate less than 0.6 mg/L
 - ❖ average total nitrogen (TN) less than 1.0 mg/L, and
 - ❖ average total phosphorus (TP) are equal to or less than 0.1 mg/L AND
- If nearby streams without wetlands meet DO criteria,

THEN determine as impaired due to natural condition
 → assess as category 4C in next assessment
 → initiate WQS reclassification to Class VII Swamp Water
 → get credit under consent decree

The hydrologic slope of Butterwood Creek is estimated at 0.14%, which is considered low slope. The low slope in this 15.59 mile segment contributes no human impact. This low slope segment encompasses about 96% of the Butterwood Creek reach from its headwaters to its confluence with Stony Creek. Decomposition of the large inputs of decaying vegetation from areas of forested land with swamps and heavy tree canopy throughout the watershed increase oxygen demand and lower DO as they decay. These are not considered anthropogenic impacts.

However, only three of the total 18 stations monitored in 2003 – 2004 for this low DO assessment had more than 10.5 percent low DO violations. These were 5ABTR014.24, the second most upstream station on Butterwood Creek; 5AWOK015.35, the most upstream White Oak Creek station; and 5ABTR006.07, a lower Butterwood Creek station below a swamp of extended length. The causes for low DO at these three stations are explained below.

Station 5ABTR014.24 with 28.8 percent violations, has a slope of 0.24 percent, which is considered low slope. However this segment contains a large pond approximately 0.5 miles in length, and a second backwatered area just upstream of 5ABTR014.24 extending downstream past the station. DEQ believes the low DO at this station is due partly to instream natural decay of vegetative material and low flow impact due to the reservoir impoundment upstream.

Station, 5AWOK015.35, with 14.3 percent low DO violations, has a slope of 0.61 percent, which is considered too high for swampwater conditions. However flows estimated during two summer low DO violations at 5AWOK015.35 by drainage area ratio from the Stony Creek near Dinwiddie, VA, gage just below Butterwood Creek, were 0.27 and 0.35 cfs in May and June 2004. DEQ believes these low flows impact DO levels by not allowing sufficient velocity and increasing residence time. Such low flow impacts are a natural condition due to the small drainage area, but are not related to swamp conditions. In the absence of rain, this creek would be at or near zero flow in summer.

Butterwood Creek at station 5ABTR006.07, with 38.1 percent low DO violations, has a slope of only 0.10 percent, which is considered very low slope. This is a 38 percent reduction in slope compared to the next six miles upstream at 0.16 percent slope, which contains a long swampy segment 4.6 miles in length. This upstream swampy segment supplies a large source of vegetative material for bacterial decomposition. DEQ believes that a significant portion of the vegetative decay occurs downstream of this segment in the slower 0.10 percent slope segment sampled by station 5ABTR006.07, which is heavily forested, and also has the appearance of swampy conditions. DEQ believes the low DO at this station is due to instream natural decay of vegetative matter from upstream and reduction in slope and presumed velocity in the downstream segment surrounding 5ABTR006.07. The swampwater effect occurs approximately between rivermiles 14.59 and 4.65, a total of 9.94 stream miles.

Butterwood Creek exhibits low nutrient concentrations below national background levels in streams from undeveloped areas, which not indicative of human impact.

Butterwood Creek exhibits natural seasonal DO fluctuation due to the inverse relationship between water temperature and DO.

There is a single permitted CAFO operation located in the Butterwood Creek watershed. Butterwood Farms, permit #VPG100028, is located near Butterwood Creek below the listing station 5ABTR002.80. The permit conditions for this facility do not allow discharge into the creek, therefore this operation probably has minimal impact to the low DO conditions of this creek. Residential / Commercial land use (0.60%) probably has no DO effect on streams in the watershed.

Based on the above information, a change in the water quality standards classification to Class VII Swampwater due to natural conditions, rather than a TMDL, is indicated for mainstem Butterwood Creek from rivermile 14.59 downstream to rivermile 4.65, a total of 9.9 stream miles. If there is a 305(b)/303(d) assessment prior to the reclassification, Butterwood Creek will be assessed as Category 4C, Impaired due to natural condition, no TMDL needed.

7.0. Public Participation

DEQ performed the assessment of the Butterwood Creek low DO natural condition in lieu of a TMDL. Therefore neither a TMDL Technical Advisory Committee (TAC) meeting nor a public meeting was involved. Public participation will occur during the next water quality standards triennial review process.

8. References

Maptech, Methodology for Assessing Natural Dissolved Oxygen and pH Impairments: Application to the Appomattox River Watershed, Virginia. 2003.

SRCC (Southeast Regional Climate Center)

http://www.dnr.state.sc.us/climate/sercc/products/historical/historical_va.html (Accessed 12/18/02)

USGS (United States Geological Survey), National Background Nutrient Concentrations in Streams from Undeveloped Areas. 1999.

VADEQ (Virginia Department of Environmental Quality), Virginia Water Quality Assessment 1998. Virginia. 1998.

VADEQ (Virginia Department of Environmental Quality), Virginia Water Quality Assessment 2002. Virginia. 2002.

Appendix A
Glossary

GLOSSARY

Note: All entries in italics are taken from USEPA (1998). All non-italicized entries are taken from MapTech (2002).

303(d). A section of the Clean Water Act of 1972 requiring states to identify and list water bodies that do not meet the states' water quality standards.

7Q10. The lowest streamflow for seven consecutive days that occurs on average once every ten years.

***Ambient water quality.** Natural concentration of water quality constituents prior to mixing of either point or nonpoint source load of contaminants. Reference ambient concentration is used to indicate the concentration of a chemical that will not cause adverse impact on human health.*

***Anthropogenic.** Pertains to the [environmental] influence of human activities.*

***Background levels.** Levels representing the chemical, physical, and Bacterial conditions that would result from natural geomorphological processes such as weathering or dissolution.*

***Best management practices (BMPs).** Methods, measures, or practices determined to be reasonable and cost-effective means for a landowner to meet certain, generally nonpoint source, pollution control needs. BMPs include structural and nonstructural controls and operation and maintenance procedures.*

***Clean Water Act (CWA).** The Clean Water Act (formerly referred to as the Federal Water Pollution Control Act or Federal Water Pollution Control Act Amendments of 1972), Public Law 92-500, as amended by Public Law 96-483 and Public Law 97-117, 33 U.S.C. 1251 et seq. The Clean Water Act (CWA) contains a number of provisions to restore and maintain the quality of the nation's water resources. One of these provisions is section 303(d), which establishes the TMDL program.*

***Concentration.** Amount of a substance or material in a given unit volume of solution; usually measured in milligrams per liter (mg/L) or parts per million (ppm).*

Confluence. The point at which a river and its tributary flow together.

***Contamination.** The act of polluting or making impure; any indication of chemical, sediment, or Bacterial impurities.*

***Designated uses.** Those uses specified in water quality standards for each waterbody or segment whether or not they are being attained.*

***Dilution.** The addition of some quantity of less-concentrated liquid (water) that results in a decrease in the original concentration.*

Direct runoff. Water that flows over the ground surface or through the ground directly into streams, rivers, and lakes.

Discharge. Flow of surface water in a stream or canal, or the outflow of groundwater from a flowing artesian well, ditch, or spring. Can also apply to discharge of liquid effluent from a facility or to chemical emissions into the air through designated venting mechanisms.

Discharge permits (under VPDES). A permit issued by the U.S. EPA or a state regulatory agency that sets specific limits on the type and amount of pollutants that a municipality or industry can discharge to a receiving water; it also includes a compliance schedule for achieving those limits. The permit process was established under the National Pollutant Discharge Elimination System, under provisions of the Federal Clean Water Act.

Domestic wastewater. Also called sanitary wastewater, consists of wastewater discharged from residences and from commercial, institutional, and similar facilities.

Drainage basin. A part of a land area enclosed by a topographic divide from which direct surface runoff from precipitation normally drains by gravity into a receiving water. Also referred to as a watershed, river basin, or hydrologic unit.

Effluent. Municipal sewage or industrial liquid waste (untreated, partially treated, or completely treated) that flows out of a treatment plant, septic system, pipe, etc.

Effluent limitation. Restrictions established by a state or EPA on quantities, rates, and concentrations in pollutant discharges.

Existing use. Use actually attained in the waterbody on or after November 28, 1975, whether or not it is included in the water quality standards (40 CFR 131.3).

GIS. Geographic Information System. A system of hardware, software, data, people, organizations and institutional arrangements for collecting, storing, analyzing and disseminating information about areas of the earth. (Dueker and Kjerne, 1989)

Hydrologic cycle. The circuit of water movement from the atmosphere to the earth and its return to the atmosphere through various stages or processes, such as precipitation, interception, runoff, infiltration, storage, evaporation, and transpiration.

Hydrology. The study of the distribution, properties, and effects of water on the earth's surface, in the soil and underlying rocks, and in the atmosphere.

In situ. In place; in situ measurements consist of measurements of components or processes in a full-scale system or a field, rather than in a laboratory.

Margin of safety (MOS). A required component of the TMDL that accounts for the uncertainty about the relationship between the pollutant loads and the quality of the

receiving waterbody (CWA section 303(d)(1)(C)). The MOS is normally incorporated into the conservative assumptions used to develop TMDLs (generally within the calculations or models) and approved by EPA either individually or in state/EPA agreements. If the MOS needs to be larger than that which is allowed through the conservative assumptions, additional MOS can be added as a separate component of the TMDL (in this case, quantitatively, a TMDL = LC = WLA + LA + MOS).

Mean. The sum of the values in a data set divided by the number of values in the data set.

MGD. Million gallons per day. A unit of water flow, whether discharge or withdraw.

Monitoring. *Periodic or continuous surveillance or testing to determine the level of compliance with statutory requirements and/or pollutant levels in various media or in humans, plants, and animals.*

Narrative criteria. *Nonquantitative guidelines that describe the desired water quality goals.*

National Pollutant Discharge Elimination System (NPDES). *The national program for issuing, modifying, revoking and re-issuing, terminating, monitoring, and enforcing permits, and imposing and enforcing pretreatment requirements, under sections 307, 402, 318, and 405 of the Clean Water Act.*

Natural waters. *Flowing water within a physical system that has developed without human intervention, in which natural processes continue to take place.*

Non-point source. *Pollution that originates from multiple sources over a relatively large area. Nonpoint sources can be divided into source activities related to either land or water use including failing septic tanks, improper animal-keeping practices, forest practices, and urban and rural runoff.*

Numeric targets. *A measurable value determined for the pollutant of concern, which, if achieved, is expected to result in the attainment of water quality standards in the listed waterbody.*

Organic matter. *The organic fraction that includes plant and animal residue at various stages of decomposition, cells and tissues of soil organisms, and substances synthesized by the soil population. Commonly determined as the amount of organic material contained in a soil or water sample.*

Peak runoff. *The highest value of the stage or discharge attained by a flood event; also referred to as flood peak or peak discharge.*

Permit. *An authorization, license, or equivalent control document issued by EPA or an approved federal, state, or local agency to implement the requirements of an environmental regulation; e.g., a permit to operate a wastewater treatment plant or to operate a facility that may generate harmful emissions.*

Point source. *Pollutant loads discharged at a specific location from pipes, outfalls, and conveyance channels from either municipal wastewater treatment plants or industrial waste treatment facilities. Point sources can also include pollutant loads contributed by tributaries to the main receiving water stream or river.*

Pollutant. *Dredged spoil, solid waste, incinerator residue, sewage, garbage, sewage sludge, munitions, chemical wastes, Bacterial materials, radioactive materials, heat, wrecked or discarded equipment, rock, sand, cellar dirt, and industrial, municipal, and agricultural waste discharged into water. (CWA section 502(6)).*

Pollution. *Generally, the presence of matter or energy whose nature, location, or quantity produces undesired environmental effects. Under the Clean Water Act, for example, the term is defined as the man-made or man-induced alteration of the physical, Bacterial, chemical, and radiological integrity of water.*

Public comment period. *The time allowed for the public to express its views and concerns regarding action by EPA or states (e.g., a Federal Register notice of a proposed rule-making, a public notice of a draft permit, or a Notice of Intent to Deny).*

Raw sewage. *Untreated municipal sewage.*

Receiving waters. *Creeks, streams, rivers, lakes, estuaries, ground-water formations, or other bodies of water into which surface water and/or treated or untreated waste are discharged, either naturally or in man-made systems.*

Restoration. *Return of an ecosystem to a close approximation of its presumed condition prior to disturbance.*

Riparian areas. *Areas bordering streams, lakes, rivers, and other watercourses. These areas have high water tables and support plants that require saturated soils during all or part of the year. Riparian areas include both wetland and upland zones.*

Riparian zone. *The border or banks of a stream. Although this term is sometimes used interchangeably with floodplain, the riparian zone is generally regarded as relatively narrow compared to a floodplain. The duration of flooding is generally much shorter, and the timing less predictable, in a riparian zone than in a river floodplain.*

Runoff. *That part of precipitation, snowmelt, or irrigation water that runs off the land into streams or other surface water. It can carry pollutants from the air and land into receiving waters.*

Slope. *The degree of inclination to the horizontal. Usually expressed as a ratio, such as 1:25 or 1 on 25, indicating one unit vertical rise in 25 units of horizontal distance, or in a decimal fraction (0.04), degrees (2 degrees 18 minutes), or percent (4 percent).*

Stakeholder. *Any person with a vested interest in assessment of natural condition or TMDL development.*

Standard. In reference to water quality (e.g. pH 6 – 9 SU limit).

Storm runoff. *Storm water runoff, snowmelt runoff, and surface runoff and drainage; rainfall that does not evaporate or infiltrate the ground because of impervious land surfaces or a soil infiltration rate lower than rainfall intensity, but instead flows onto adjacent land or into waterbodies or is routed into a drain or sewer system.*

Streamflow. *Discharge that occurs in a natural channel. Although the term "discharge" can be applied to the flow of a canal, the word "streamflow" uniquely describes the discharge in a surface stream course. The term "streamflow" is more general than "runoff" since streamflow may be applied to discharge whether or not it is affected by diversion or regulation.*

Stream restoration. *Various techniques used to replicate the hydrological, morphological, and ecological features that have been lost in a stream because of urbanization, farming, or other disturbance.*

Surface area. *The area of the surface of a waterbody; best measured by planimetry or the use of a geographic information system.*

Surface runoff. *Precipitation, snowmelt, or irrigation water in excess of what can infiltrate the soil surface and be stored in small surface depressions; a major transporter of nonpoint source pollutants.*

Surface water. *All water naturally open to the atmosphere (rivers, lakes, reservoirs, ponds, streams, impoundments, seas, estuaries, etc.) and all springs, wells, or other collectors directly influenced by surface water.*

Topography. *The physical features of a geographic surface area including relative elevations and the positions of natural and man-made features.*

Total Maximum Daily Load (TMDL). *The sum of the individual wasteload allocations (WLAs) for point sources, load allocations (LAs) for nonpoint sources and natural background, plus a margin of safety (MOS). TMDLs can be expressed in terms of mass per time, toxicity, or other appropriate measures that relate to a state's water quality standard.*

Tributary. *A lower order-stream compared to a receiving waterbody. "Tributary to" indicates the largest stream into which the reported stream or tributary flows.*

Variance. *A measure of the variability of a data set. The sum of the squared deviations (observation – mean) divided by (number of observations) – 1.*

DCR. Department of Conservation and Recreation.

DEQ. Virginia Department of Environmental Quality.

VDH. Virginia Department of Health.

Wastewater. Usually refers to effluent from a sewage treatment plant. See also **Domestic wastewater**.

Wastewater treatment. Chemical, Bacterial, and mechanical procedures applied to an industrial or municipal discharge or to any other sources of contaminated water to remove, reduce, or neutralize contaminants.

Water quality. The Bacterial, chemical, and physical conditions of a waterbody. It is a measure of a waterbody's ability to support beneficial uses.

Water quality criteria. Levels of water quality expected to render a body of water suitable for its designated use, composed of numeric and narrative criteria. Numeric criteria are scientifically derived ambient concentrations developed by EPA or states for various pollutants of concern to protect human health and aquatic life. Narrative criteria are statements that describe the desired water quality goal. Criteria are based on specific levels of pollutants that would make the water harmful if used for drinking, swimming, farming, fish production, or industrial processes.

Water quality standard. Law or regulation that consists of the beneficial designated use or uses of a waterbody, the numeric and narrative water quality criteria that are necessary to protect the use or uses of that particular waterbody, and an antidegradation statement.

Watershed. A drainage area or basin in which all land and water areas drain or flow toward a central collector such as a stream, river, or lake at a lower elevation.