



Guidelines for In-House Composting Poultry Mortality as a Rapid Response to Avian Influenza

Virginia Cooperative Extension
Knowledge for the Commonwealth

Gary A. Flory¹, Virginia Department of Environmental Quality, gaflory@deq.virginia.gov

Eric S. Bendfeldt², Virginia Cooperative Extension, ebendfel@vt.edu

Robert W. Peer³, Virginia Department of Environmental Quality, rwpeer@deq.virginia.gov

Chris Zirkle⁴, Pilgrim's Pride, czirkle@pilgrimspride.com

SUMMARY OF THE METHOD

- Summary of Method
- Advantages of In-House Composting
- Planning Prior to an Outbreak
- Equipment and Supplies
- Protocols
 - Prior to Euthanizing the Flock
 - Euthanizing the Flock
 - Constructing the Windrow
 - Breeder Houses
 - Double-Deck Houses
- Temperature Monitoring
- Aerating the Windrow
- Testing for Virus
- Removing the Compost from Poultry House
- Troubleshooting
- Temperature Log
- List of References

Composting is the natural degradation of organic resources (such as poultry carcasses) by microorganisms. Research in Maryland, Delaware, and North Carolina indicates that composting is effective in killing a variety of diseases including avian influenza (AI). In-house composting was successfully used in Delaware and Maryland to control an outbreak of AI. Current research in Virginia indicates that in-house composting can be effective with most bird types and poultry house designs.

Lu et al. (2003) reported that Avian Influenza Virus (AIV) can be inactivated in 10 minutes at 140°F (60°C) or 90 minutes at 133°F (56°C). Microbial activity within a well-constructed compost pile can generate and maintain temperatures ranging from 130°F to 150°F (54°C to 66°C) for several weeks, which is sufficient to inactivate the AI virus with generous margins of error.

ADVANTAGES OF IN-HOUSE COMPOSTING

- Contains the disease and limits off-farm disease transmission
- Limits the risks of groundwater and air pollution
- Inactivates pathogens in carcasses and litter
- Limits public concerns over disease exposure
- Relative low cost and uses readily available farm equipment
- Protected from severe weather conditions (frozen ground, etc.)

PLANNING PRIOR TO AN OUTBREAK

- Additional sources of carbon material should be identified and secured to ensure availability.
- Rapid Response Teams, with team leaders and alternates, should be created within each poultry complex to oversee sanitation, depopulation, and in-house composting.
- Rapid Response Team training should include respirator fit testing.
- Worker decontamination plans and equipment should be prepared.
- Movement of carcasses in the houses and equipment brought onto the farm should be limited.
- In-house composting can be done in most poultry houses. Where not possible, composting outside the poultry house using a breathable compost cover or fleece would be an alternative.
- Variations in house designs may require adaptations to euthanasia and windrow construction methods outlined in this fact sheet.

“Research indicates that Avian Influenza Virus (AIV) can be inactivated in 10 minutes at 140°F (60°C) or 90 minutes at 133°F (56°C) (Lu et al., 2003).”

A demonstration project of in-house composting of turkeys conducted in Virginia in 2005 showed that tilling and crushing the carcasses increased temperature and decreased downtime by 3 and 11 days respectively.



EQUIPMENT AND SUPPLIES

- Skid steer loader(s), tiller attachment, hay spear, and scoops
- Sawdust, litter, woodchips, or other carbon material
- Compost thermometers (36" or 48" stem length) or wireless/wired temperature probes
- Power washer, disinfecting equipment and recommended disinfectants


PROTOCOLS

Prior to euthanizing the flock

- Ensure that all personnel have appropriate personal protective equipment and training.
- Turn off fans, close curtains, raise poultry feeders, and waterers.
- Effective in-house composting must have a minimum of 1.5 pounds of carbon material (based a 30 lbs./cubic foot material) per pound of bird. (1 lb. of carbon per lb. of bird in the mix and the remaining carbon for cap and cover.)
- Determine total pounds (lbs.) of birds
 - lbs. birds = number of birds X average weight in lbs.
- Determine pounds of litter in house
 - cubic feet of litter = length of house X width of house X depth of litter (in feet)
 - lbs. litter = cubic feet of litter X weight of a cubic foot of litter (Average = 30 lbs; Range = 25 to 35 lbs.)
- Determine amount of additional carbon needed
 - total lbs. carbon needed = lbs. birds X 1.5
 - Cubic yards of additional carbon needed = (total lbs. carbon needed – lbs. litter in house)/(weight per cubic ft. of carbon material)/(27)
 - woodchips, litter or wet sawdust = 30 lbs./cubic ft.
 - dry sawdust = 15 lbs./cubic ft. (due to low density, volume can be reduced by 50%)
- Mobilize euthanasia, composting, and sanitation crews.

Euthanizing the flock

- Birds may be confined to a portion of the house for euthanasia (see Figure 1). If whole-house euthanasia methods are used, windrow construction procedures will differ.

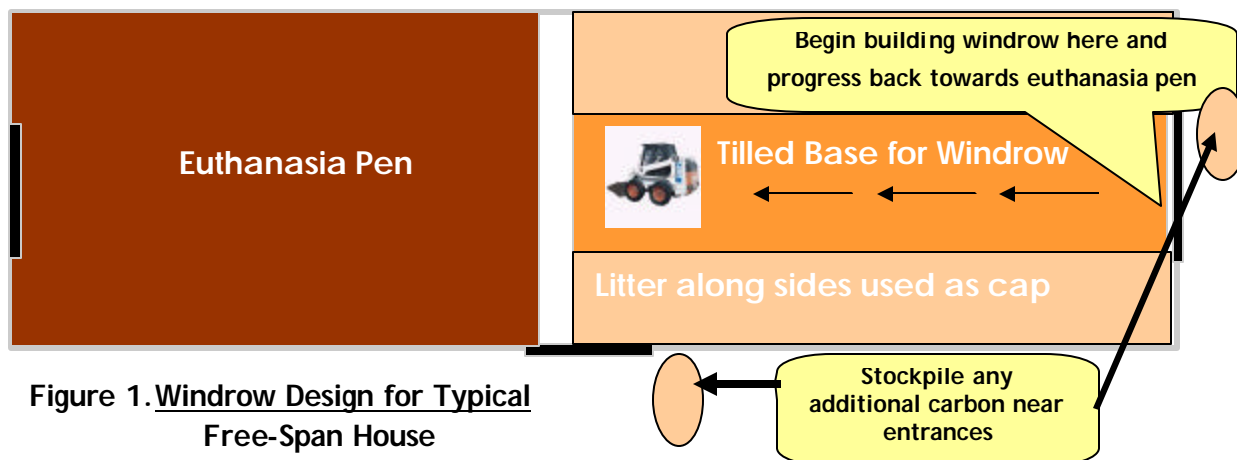

Euthanizing the flock (continued)

- Breeder and double-deck houses require alternate windrow designs.
- Unload additional carbon material (if needed) near doors so it is accessible during windrow construction.
- Follow industry guidelines for humane euthanasia.

Construction of Windrows in Free-Span Houses

- Till caked litter in the house to form a good base (4-6 inches) for the windrow (avoid compacting windrow base with equipment traffic).
- Use the skid loader and/or tractor to crush the birds within the euthanasia pen.
- Place any remaining feed on top the birds.
- Begin mixing birds and litter from the euthanasia end of the poultry house alternating 1 loader bucket of birds with 2 bucket of litter/carbon.
- Using the skid loader, begin constructing the windrow with the bird/litter mix on the tilled base at the other end of the poultry house (see Figure 1).
- The windrow should be 4 to 6 feet high and 12 feet wide.
- As the windrow is being constructed, cap with 4 to 6 inches of litter from the sides of the windrow.
- Continue this process until all of the bird/litter mix has been added to the windrow.
- Any remaining litter should be used to cap the windrow.

Considerations for Breeder Houses

- All operations must occur within the 13-foot scratch area between the slats (see Figure 2).
- Base should be a minimum of 4 to 6 inches.
- Compost piles should be constructed 4 to 6 feet high, if possible, and capped as the windrow is constructed.
- Once windrow construction begins, no additional equipment or supplies will be accessible until all birds have been added to the windrow because the skidloader will be confined to the middle of the house.

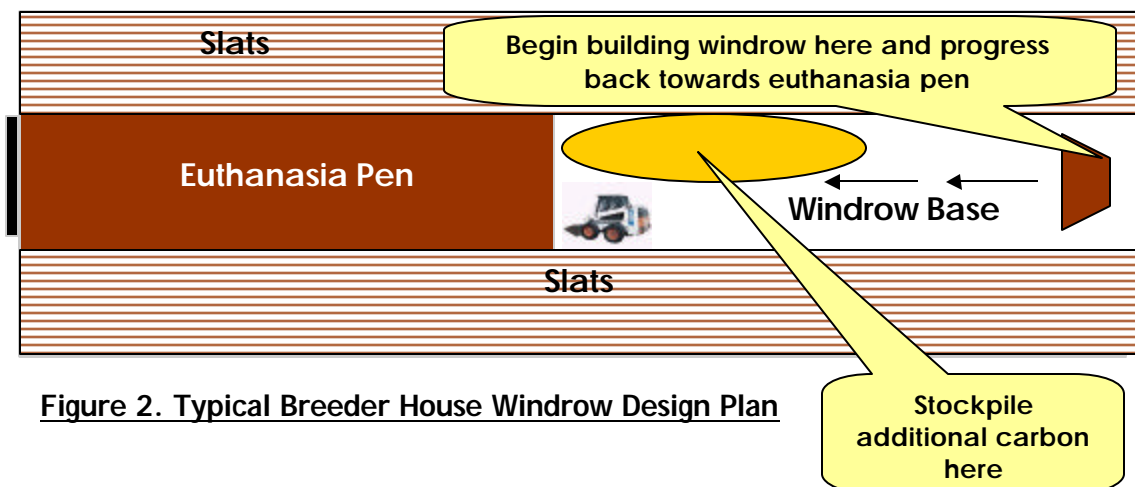


Figure 2. Typical Breeder House Windrow Design Plan



“Composting is the natural degradation of organic resources (such as poultry carcasses) by microorganisms.”

Considerations for Double-Deck Houses

- Euthanize birds both upstairs and downstairs.
- Crush birds downstairs with skid loader.
- Establish a minimum of a 4 to 6 inch base.
- Begin composting downstairs by mixing birds and litter; build the first windrow in the side alley of the building (see Figure 3).
- If there is sufficient height, the windrows can be capped after both are constructed, otherwise, they should be capped as constructed.
- Using a small tractor, push only enough birds and litter from upstairs down through the trap doors that can be crushed effectively prior to placing in the next windrow.
- The windrow for the birds and litter from upstairs should be started in the opposite side alley (see Figure 3).
- Alternate pushing birds and litter downstairs, crushing and mixing, and forming the windrow until all birds and litter from the upstairs have been added to the windrow.
- If not capped during construction, cap the windrows with litter or other carbon source so no carcasses are exposed.

TEMPERATURE MONITORING

- Temperatures within the center of the compost piles should be regularly monitored at 25 to 50 foot intervals the length of the windrow and charted. See sample log on page 6.
- Remote temperature monitoring is preferable for biosecurity and worker safety.
- Windrow temperatures should reach at least 130° F within the first week (see Figure 4).



AERATING THE WINDROW

- If the windrow temperature peaks and drops below 105° F within the first two weeks, it should be aerated by slowly lifting with a hay spear along the length of the pile. This method does not disturb the cap and allows oxygen into the pile. If a fork is not available or space is limited, the pile can be turned and

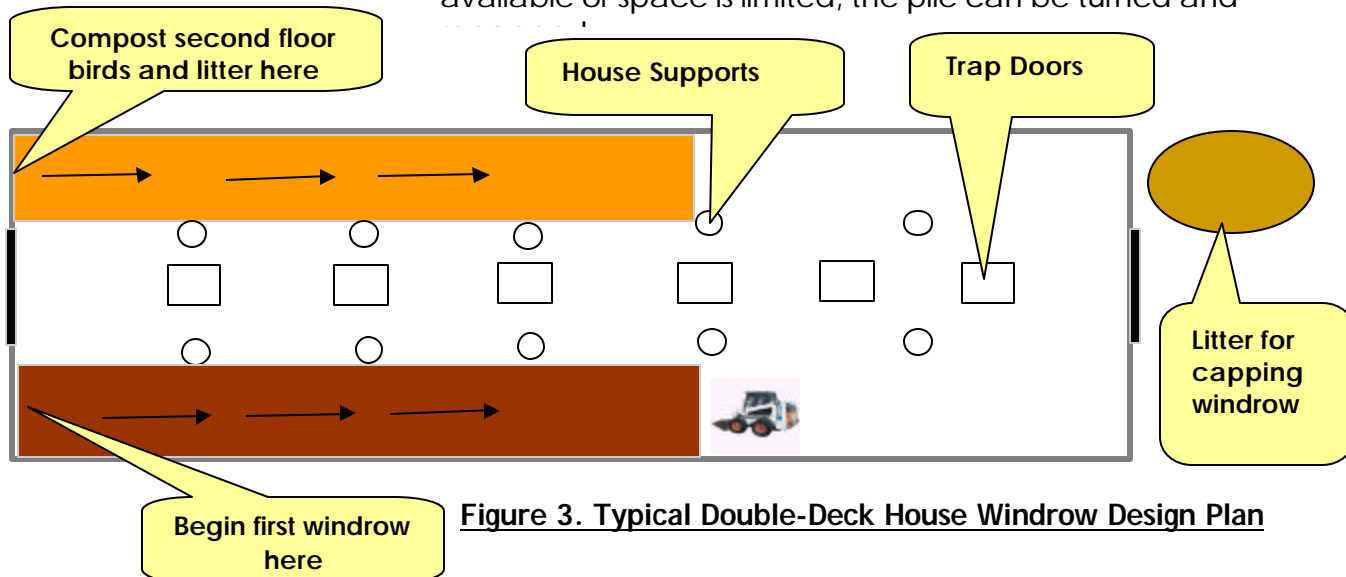


Figure 3. Typical Double-Deck House Windrow Design Plan

TESTING FOR VIRUS

- Virus isolation testing should be conducted after 2 weeks.

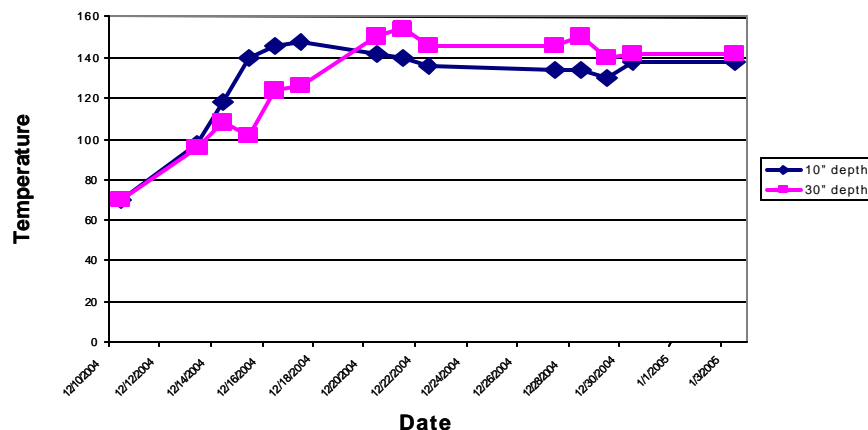


Figure 4. Representative Temperature Graph for Windrow Composting

REMOVING THE COMPOST FROM THE POULTRY HOUSE

- Temperatures should be regularly monitored after construction to ensure inactivation of virus.
- 3 to 4 weeks after construction of windrow, the material within the pile should be inspected to evaluate the decomposition of the carcasses. At this stage, carcasses should be reduced to bones and feathers with little flesh remaining.
- If inspection confirms the near complete decomposition of all fleshy material and virus isolation results (per USDA or State Veterinarian protocol) have come back negative, the compost can be removed from the poultry house and deep stacked in a litter storage shed or on an appropriate site covered with a compost fleece for additional curing.
- A sample should be collected and submitted for nutrient analysis.
- Upon receipt of litter analysis and subject to quarantine release by the State Veterinarian the compost may be land applied at agronomic rates.
- A transportation subsidy of \$10 per ton may be necessary to facilitate the movement and distribution of the compost and overcome the stigma associated with material originating from an AI positive farm.

TROUBLESHOOTING

Problem	Issue	Solution
Excessive flies or odor	Exposed carcasses	Add additional cap material
Leachate from windrow	Mixture too wet	Add additional carbon material, mix and cap
Temperature does not reach 135°F	Mixture too dry (< 40% moisture)	Add water to pile, mix if necessary
Temperature does not reach 135°F	Mixture too wet (> 60 % moisture)	Add additional carbon material, mix if necessary
Temperature drops early	Not enough oxygen	Aerate or mix pile

In-House Composting Temperature Log

Farm Name: _____

House Number: _____

[illegible]

LIST OF REFERENCES

- Lu H., Castro A.E., Pennick K., Liu J., Yang Q., Dunn P., Weinstock D., and D. Henzler. 2003. Survival of Avian Influenza virus H7N2 in SPF Chickens and Their Environments. *Avian Diseases* 47:1015-1021
- Malone, G. 2004. In-house composting of avian influenza infected flocks. *Proceedings 2004 Virginia Poultry Health & Management Seminar*. Roanoke, VA. pp. 23-24.
- Malone, G., S. Cloud, R. Alphin, L. Carr and N. Tablante. 2004. Delmarva in-house carcass composting experiences. *Proceedings 2004 National Meeting on Poultry Health and Processing*. Ocean City, MD. pp. 27-29.
- McClaskey, J. 2004. Economic and Cost Considerations. Ch. 9 *In: Carcass Disposal: A comprehensive review*. National Agricultural Biosecurity Center Consortium
- Senne, D.A., T.J. Holt, and B.L. Akey. 2004. An overview of the 2002 outbreak of low-pathogenic H7N2 avian influenza in Virginia, West Virginia, and North Carolina. (Available on-line at http://library.wur.nl/frontis/avian_influenza/06_senne.pdf) (Verified 27 April 2005).
- Swayne, D.E., and B.L. Akey, 2004. Avian influenza control strategies in the United States of America. pp. 113-130. In: G. Koch (ed.) *Proc. of the Wageningen Frontis International Workshop on Avian Influenza Prevention and Control*. Wageningen. The Netherlands: Kluwer Academic Publishers. (Available on-line at http://library.wur.nl/frontis/avian_influenza/13_swayne.pdf.) (Verified 17 March 2005).
- Tablante, N.L., L.E. Carr, G.W. Malone, P.H. Patterson, F.N. Hegngi, G. Felton, and N. Zimmerman. 2002. *Guidelines for In-house Composting of Catastrophic Poultry Mortalities*. Maryland Cooperative Extension Fact Sheet 801.
- Virginia Department of Environmental Quality. 2002. *Avian Influenza Outbreak Summary*. VA. Dep. Env. of Qual. Harrisonburg, Virginia.

ADDITIONAL CONTACT INFORMATION

¹ Agricultural and Water Quality Assessment Manager, Virginia Department of Environmental Quality, Valley Regional Office, P.O. Box 3000, Harrisonburg, Virginia 22801 Phone: (540) 574-7840 Fax: (540) 574-7844 Email: gaflory@deq.virginia.gov

² Area Specialist, Community Viability, Virginia Cooperative Extension, 2322 Blue Stone Hills Drive, Suite 140, Harrisonburg, Virginia 22801 Phone: (540) 432-6029 Fax: (540) 432-6251 Email: ebendfel@vt.edu

³ Agricultural Program Coordinator, Virginia Department of Environmental Quality, Valley Regional Office, P.O. Box 3000, Harrisonburg, Virginia 22801 Phone: (540) 574-7866 Fax: (540) 574-7844 Email: rwpeer@deq.virginia.gov

⁴ Nutrient Management Specialist, Pilgrim's Pride, Broadway, VA 22815 czirkle@pilgrimspride.com

Virginia Cooperative Extension programs and employment are open to all, regardless of race, color, national origin, sex, religion, age, disability, political beliefs, sexual orientation, or marital or family status. An equal opportunity/affirmative action employer.

Issued in furtherance of Cooperative Extension work, Virginia Polytechnic Institute and State University, Virginia State University, and the U.S. Department of Agriculture cooperating. Mark McCann, Interim Director, Virginia Cooperative Extension, Virginia Tech, Blacksburg; Alma C. Hobbs, Administrator, 1890 Extension Program, Virginia State, Petersburg.