

VIRGINIA POLLUTION ABATEMENT PERMIT APPLICATION: PART D-VI LAND APPLICATION AGREEMENT

Permittee: Houff's Feed & Fertilizer

County or City: Rockingham

Landowner: Hillview Farms, Inc.

Landowner Site Management Requirements:

I, the Landowner, I have received a DEQ Biosolids Fact Sheet that includes information regarding regulations governing the land application of biosolids, the components of biosolids and proper handling and land application of biosolids.

I have also been expressly advised by the Permittee that the site management requirements and site access restrictions identified below must be complied with after biosolids have been applied on my property in order to protect public health, and that I am responsible for the implementation of these practices.

I agree to implement the following site management practices at each site under my ownership following the land application of biosolids at the site:

1. **Notification Signs:** I will not remove any signs posted by the Permittee for the purpose of identifying my field as a biosolids land application site, unless requested by the Permittee, until at least 30 days after land application at that site is completed.
2. **Public Access**
 - a. Public access to land with a high potential for public exposure shall be restricted for at least one year following any application of biosolids.
 - b. Public access to land with a low potential for public exposure shall be restricted for at least 30 days following any application of biosolids. No biosolids amended soil shall be excavated or removed from the site during this same period of time unless adequate provisions are made to prevent public exposure to soil, dusts or aerosols;
 - c. Turf grown on land where biosolids are applied shall not be harvested for one year after application of biosolids when the harvested turf is placed on either land with a high potential for public exposure or a lawn, unless otherwise specified by DEQ.
3. **Crop Restrictions:**
 - a. Food crops with harvested parts that touch the biosolids/soil mixture and are totally above the land surface shall not be harvested for 14 months after the application of biosolids.
 - b. Food crops with harvested parts below the surface of the land shall not be harvested for 20 months after the application of biosolids when the biosolids remain on the land surface for a time period of four (4) or more months prior to incorporation into the soil,
 - c. Food crops with harvested parts below the surface of the land shall not be harvested for 38 months when the biosolids remain on the land surface for a time period of less than four (4) months prior to incorporation.
 - d. Other food crops and fiber crops shall not be harvested for 30 days after the application of biosolids;
 - e. Feed crops shall not be harvested for 30 days after the application of biosolids (60 days if fed to lactating dairy animals).
4. **Livestock Access Restrictions:**

Following biosolids application to pasture or hayland sites:


 - a. Meat producing livestock shall not be grazed for 30 days,
 - b. Lactating dairy animals shall not be grazed for a minimum of 60 days.
 - c. Other animals shall be restricted from grazing for 30 days;
5. Supplemental commercial fertilizer or manure applications will be coordinated with the biosolids and industrial residuals applications such that the total crop needs for nutrients are not exceeded as identified in the nutrient management plan developed by a person certified in accordance with §10.1-104.2 of the Code of Virginia;
6. Tobacco, because it has been shown to accumulate cadmium, should not be grown on the Landowner's land for three years following the application of biosolids or industrial residuals which bear cadmium equal to or exceeding 0.45 pounds/acre (0.5 kilograms/hectare).

Hillview Farm Inc. by Steve W. Craun 7-6-15
Landowner's Signature Date

Site: CRAUN
Owner: Hillview Farm, LLC
Operator: Steve and Kevin Craun

Tax Map








Field	Gross Acres
MC-1	28.2
MC-1A	13.4
MC-2	19.5
MC-3	21.4
MCP-1	27.5
MCP-2	54.8
MCP-3	22.7
MCP-4	32.9

	CRAUN Public Building (not OSR)		CRAUN Streams (100' buffer or 35' vegetated)
	CRAUN Rocks (50' buffer)		CRAUN Property Line (100' buffer)
	CRAUN Wells (100' buffer)		CRAUN Ponds (100' buffer or 35' vegetated)
	CRAUN Houses (200' buffer)		CRAUN Steep Land
	CRAUN Closed Sinkholes (50' buffer)		CRAUN Fields
	CRAUN Public Area Property Lines (200' buffer)		



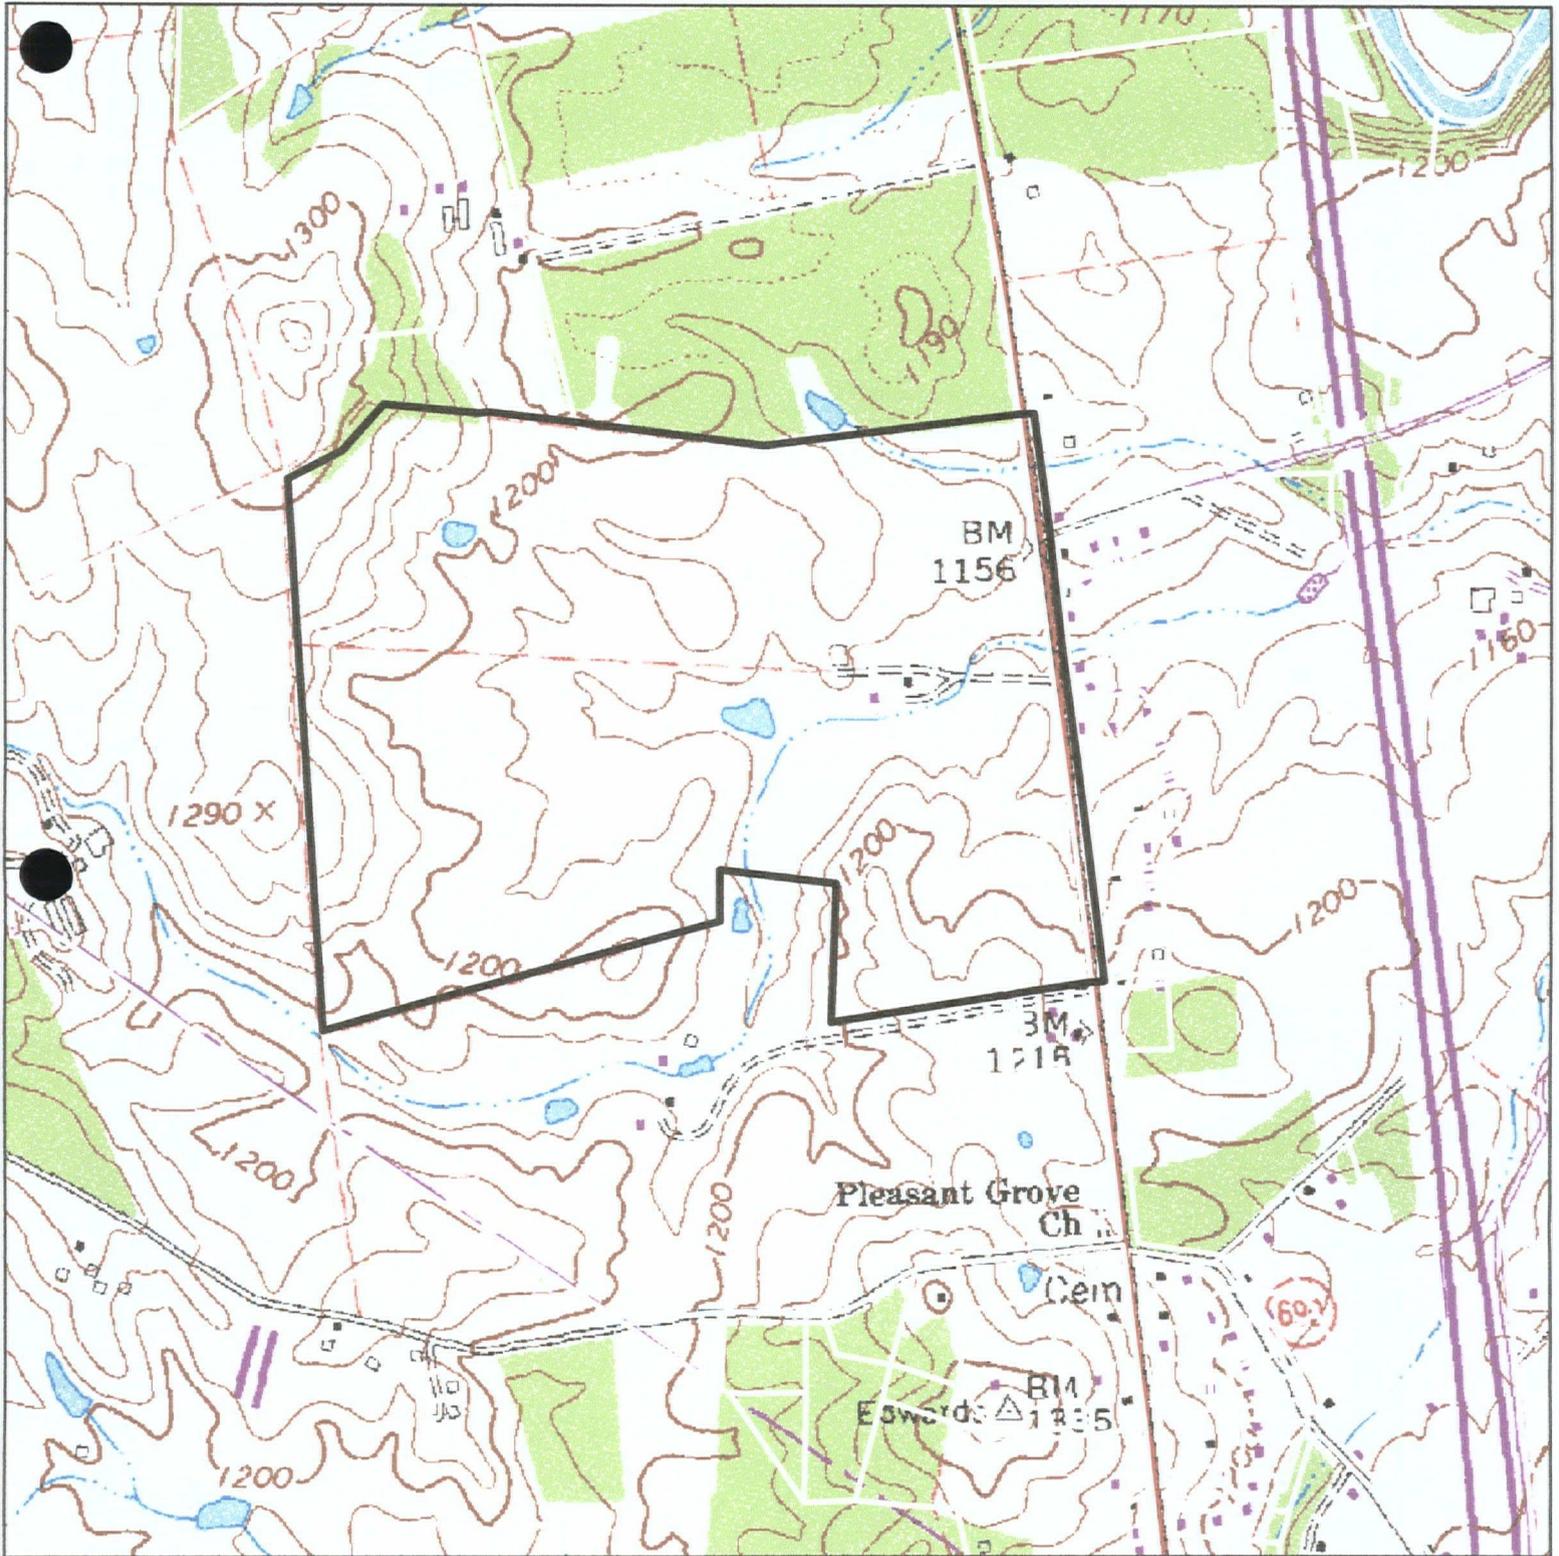

Site: CRAUN
Owner: Hillview Farm, LLC
Operator: Steve and Kevin Craun

General Location Map

